MULTIFUNCTIONAL PLATFORM “TRANSFORMER” 3393TT

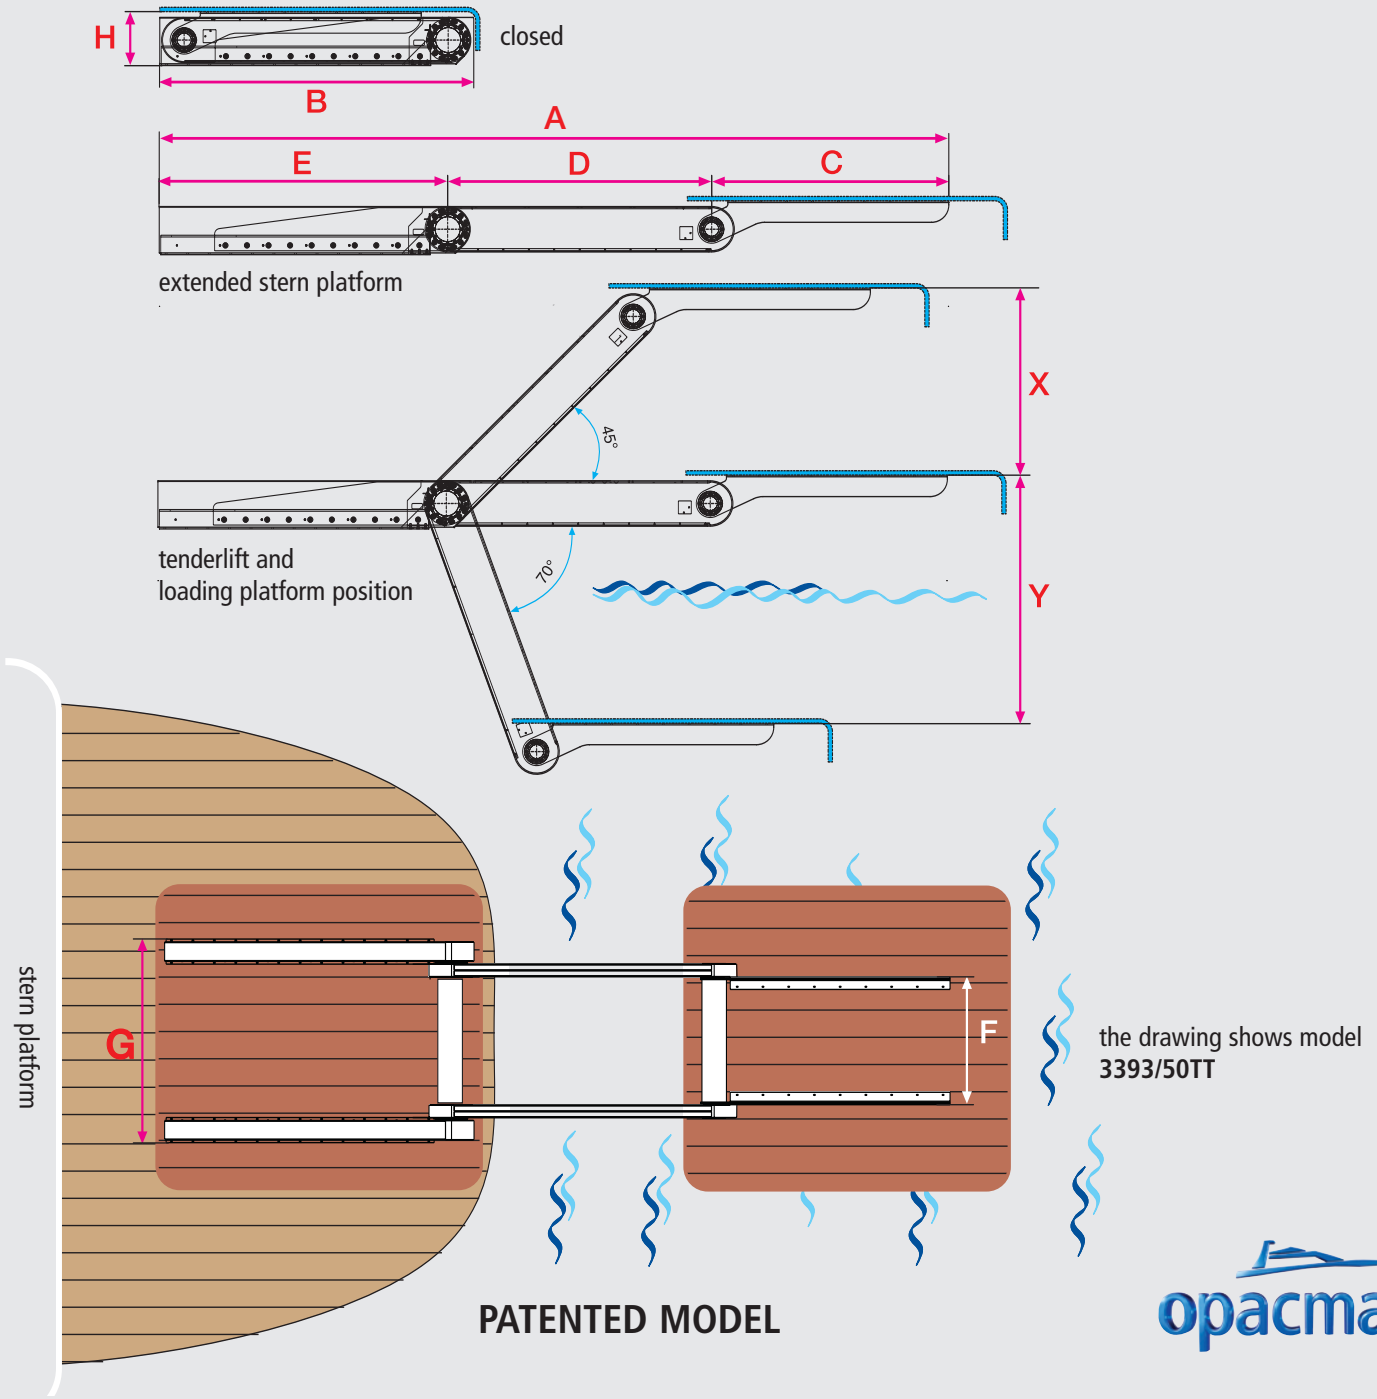

For dimensions and capacities, please look at the following page

opacmare

MULTIFUNCTIONAL PLATFORM "TRANSFORMER" 3393TT (Tenderlift version)

PATENTED MODEL

model **3393/40TT**
in raised position

model **3393/50TT**
in lowered position

All models of "TRANSFORMER" platforms in series 3390TT can be transformed in equivalent models in series 3380. Steps addition allows tender lifting and stern extension; fur ther more, in this case the platform can be used as a gangway or as a beach stepladder.
(for technical specifications, please look at the catalogue and the technical date of series 3380).

380 V power supply

Guaranteed lifting capacity when loaded at the barycentric point on E/2

model	A (mm/inch)	B (mm/inch)	C (mm/inch)	D (mm/inch)	E (mm/inch)	F (mm/inch)	G (mm/inch)	H (mm/inch)	X (mm/inch)	Y (mm/inch)	capacity standard (kg/lbs)	weight (kg/lbs)
3393.40TT	2950 116"	1215 48"	860 34"	980 39"	1110 44"	1395 55"	2130 84"	270 10"5/8	695 27"	920 36"	980 2,200	407 895
3393.50TT	3685 145"	1460 58"	1105 43"	1225 48"	1355 53"	1395 55"	2130 84"	270 10"5/8	865 34"	1150 45"	700 1,550	495 1,090
3393.60TT	4420 174"	1705 67"	1350 53"	1470 58"	1600 63"	1395 55"	2130 84"	270 10"5/8	1040 41"	1380 54"	550 1,200	598 1,310

LOADING CAPACITY IS MEANT FOR TOTAL PLATFORM WEIGHT (AT SHIPYARD CARE) AND FULL-LOAD TENDER, JET SKI POSSIBLY.

UPDATED ON 27/09/10

opacmare