


Sunbed model 2646



model	A (mm/inch)	B (mm/inch)	C (mm/inch)	D (mm/inch)	E (mm/inch)	F (mm/inch)	G (mm/inch)	H (mm/inch)	α
2646/01	2775 109 ¹ / ₄	2390 94 ¹ / ₁₀	1235 48 ³ / ₅	820 32 ¹ / ₄	1130 44 ¹ / ₂	1080 42 ¹ / ₂	150 5 ⁹ / ₁₀	695 27 ¹ / ₃	123°
2646/02	2535 99 ⁴ / ₅	2095 82 ¹ / ₂	400 15 ³ / ₄	790 31 ¹ / ₁₀	1170 46"	335 13 ¹ / ₅	150 5 ⁹ / ₁₀	710 28"	126,5°

An automatic system for retractable platform movement, operated by two hydraulic cylinders, made of AISI 316L stainless steel with safety closing by means of hydraulic locking pins. This system is ideal for transom positioning and can be used as a sunbed.

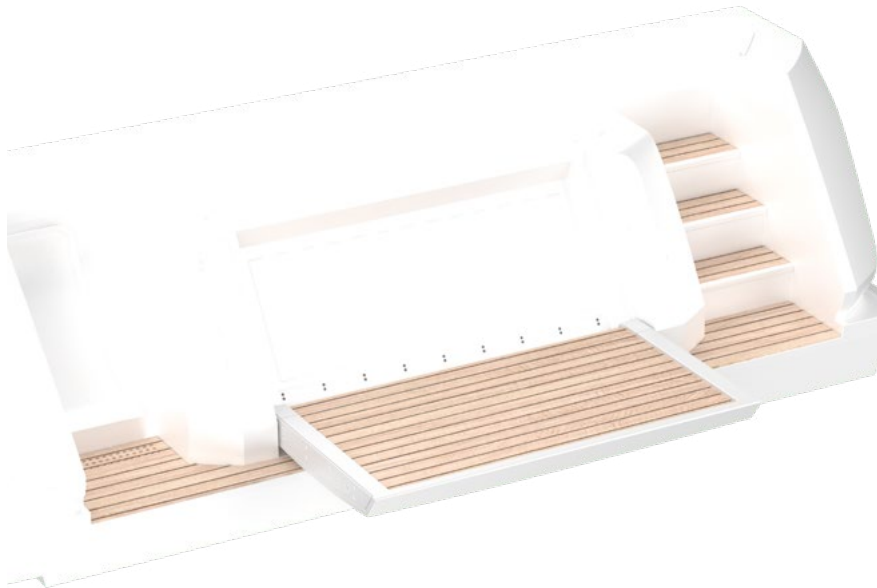