

Manual sliding systems model 3520/21/22/25/40




model	Stroke (mm/inch)	A (mm/inch)	B (mm/inch)	C (mm/inch)	α
3520.01	400 15 ³ / ₄	640 25 ¹ / ₈	190 7 ¹ / ₂	147 5 ³ / ₄	-
3520.03	400 15 ³ / ₄	540 21 ¹ / ₄	190 7 ¹ / ₂	147 5 ³ / ₄	-
3520.04	--	525 20 ⁷ / ₁₀	145 5 ⁷ / ₁₀	105 4 ¹ / ₁₀	-
3521.01	2290 90 ¹ / ₁₀	530/490 20 ⁹ / ₁₀ / 19 ³ / ₁₀	140/170 5 ¹ / ₂ / 6 ⁷ / ₁₀	147 5 ³ / ₄	-
3521.02	1000 39 ³ / ₈	530/490 20 ⁹ / ₁₀ / 19 ³ / ₁₀	140/170 5 ¹ / ₂ / 6 ⁷ / ₁₀	147 5 ³ / ₄	-
3521.03	400 15 ³ / ₄	530/490 20 ⁹ / ₁₀ / 19 ³ / ₁₀	140/170 5 ¹ / ₂ / 6 ⁷ / ₁₀	147 5 ³ / ₄	-
3521.04	450 17 ⁷ / ₁₀	530/490 20 ⁹ / ₁₀ / 19 ³ / ₁₀	140/170 5 ¹ / ₂ / 6 ⁷ / ₁₀	147 5 ³ / ₄	-
3521.05	400 15 ³ / ₄	530 20 ⁹ / ₁₀	150 5 ⁹ / ₁₀	135 5 ³ / ₁₀	-
3522	470 18 ¹ / ₂	660 26"	366 14 ² / ₅	300 11 ⁴ / ₅	-
3525.01	--	800/730 31 ¹ / ₂ / 28 ³ / ₄	200/256 7 ⁹ / ₁₀ / 10"	127Str 5"	-
3540.00	--	510 20"	150 5 ⁹ / ₁₀	100 3 ⁹ / ₁₀	20°

Manual slider for Tender handling and easy hauling and loading operations.
Variable Loading capacity, shape and stroke lengths according to models.

TEAK COVER AT SHIPYARD CARE

LEAD TIME TO BE CONFIRMED

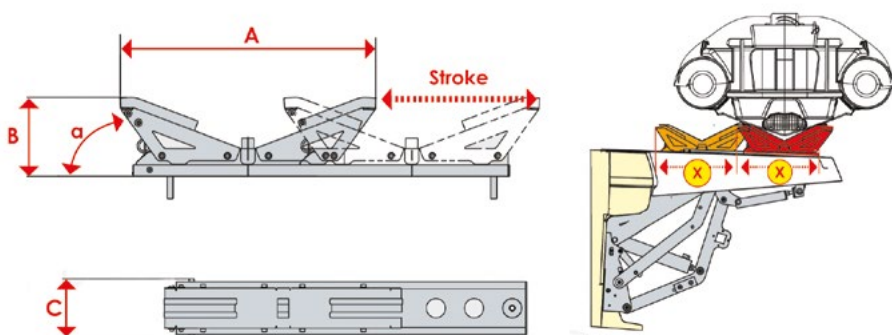

Tender saddles and launching systems