


BOX GANGWAYS extension 1495 mm to 2415 mm

model 1003/11/33/41 and 1103/41, H box: 156 mm to 230 mm

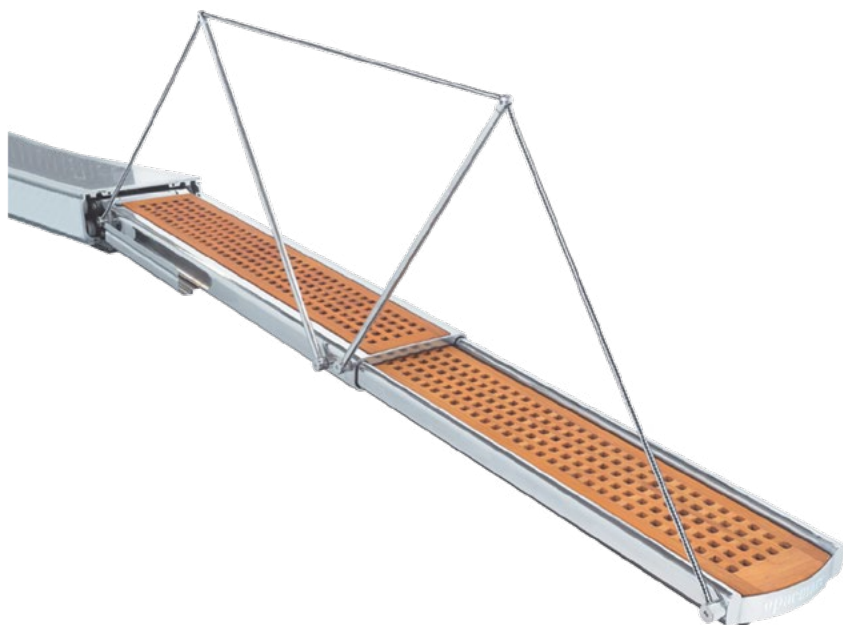

model	N. elements	A (mm/inch)	B (mm/inch)	C (mm/inch)	F (mm/inch)	H (mm/inch)	L (mm/inch)	α	β	lifting optional (kg/lbs)	weight (kg/lbs)
1011/15	1	1495 59"	1950 77"	--	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	160/360	75/165
1011/18	1	1810 71"	2250 89"	--	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	160/360	100/220
1011/22	1	2210 87"	2660 105"	--	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	160/360	123/270
1041/15*	2	1500 59"	1420 56"	--	260 10"	156 6 ¹ / ₈ "	400 16"	20°	16°	--	92/210
1041/19	2	1875 74"	1570 62"	--	260 10"	156 6 ¹ / ₈ "	400 16" 450 18"	20°	16°	--	148/325
1041/22	2	2255 88 ³ / ₄ "	1770 69 ⁷ / ₁₀ "	--	260 10"	156 6 ¹ / ₈ "	450 18"	17°	7°	--	--
1041/23	2	2255 89"	1770 70"	--	260 10"	156 6 ¹ / ₈ "	400 16" 450 18"	20°	16°	--	152/335
1141/18	2	1800 71"	1620 64"	80 3 ⁵ / ₃₂ "	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	122/270
1141SP20	2	1900 74 ⁴ / ₅ "	1760 69 ³ / ₁₀ "	120 4 ³ / ₄ "	260 10"	156 6 ¹ / ₈ "	450 18"	20°	10°	--	--
1141/19	2	1920 75 ⁹ / ₁₀ "	1575 62"	250 9 ⁴ / ₅ "	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	126/275
1141/24	2	2415 95"	1930 76"	150 5 ⁸ / ₇ "	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	146/330
1003/19*	3	1930 76"	1540 61"	--	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	165/370
1003/23	3	2280 90"	1640 65"	--	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	186/410
1033/19*	3	1930 76"	1540 61"	--	300 11 ⁴ / ₅ "	195 7 ² / ₃ "	550 22"	18°	16°	--	155/340
1033/23	3	2280 90"	1640 64 ³ / ₅ "	--	300 11 ⁴ / ₅ "	195 7 ² / ₃ "	550 22"	18°	16°	--	170/375
1103/21*	3	2130 84"	1740 69"	200 7 ⁴ / ₅ "	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	150/330	200/440

Optional box: weathertight, watertight and certificated watertight.

For 1041/1141 model with L.BOX 400 mm are available only with manual stanchions.
This gangway allows the boarding of 150 Kg / 330 lbs maximum (one person at a time).

A= maximum length of gangway outside of the box

B= box length

C= distance between the gangway hinges and the box

H= box height

L= box width

α and β= the total angle the gangway can achieve.

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

*Automatic stanchions are not available.

Tender lifting customisation can be required on models 1002/1003/1102/1103

LEAD TIME TO BE CONFIRMED

These models are not available with different box widths.

Available box widths (Optional)	
L_box (mm/inch)	F (mm/inch)
510 20"	260 10 ¹ / ₄ "
550 22"	300 11 ⁴ / ₅ "
590 23 ¹ / ₄ "	340 13 ² / ₅ "
660 26"	410 16 ¹ / ₆ "
710 28"	460 18"

