
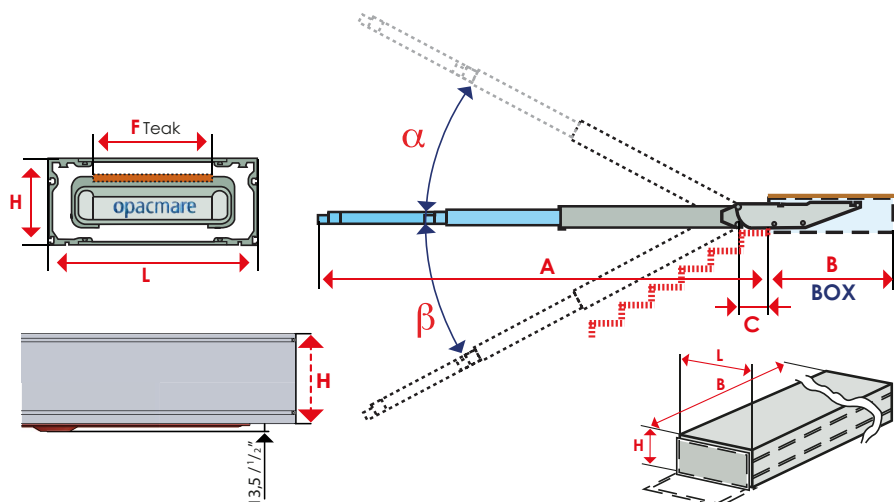


BOX GANGWAYS extension 2505 mm to 3490 mm, model 1002/O3/11/32/33/41/43 and 1102/O3/33/41/43, H box: 156 mm to 230 mm

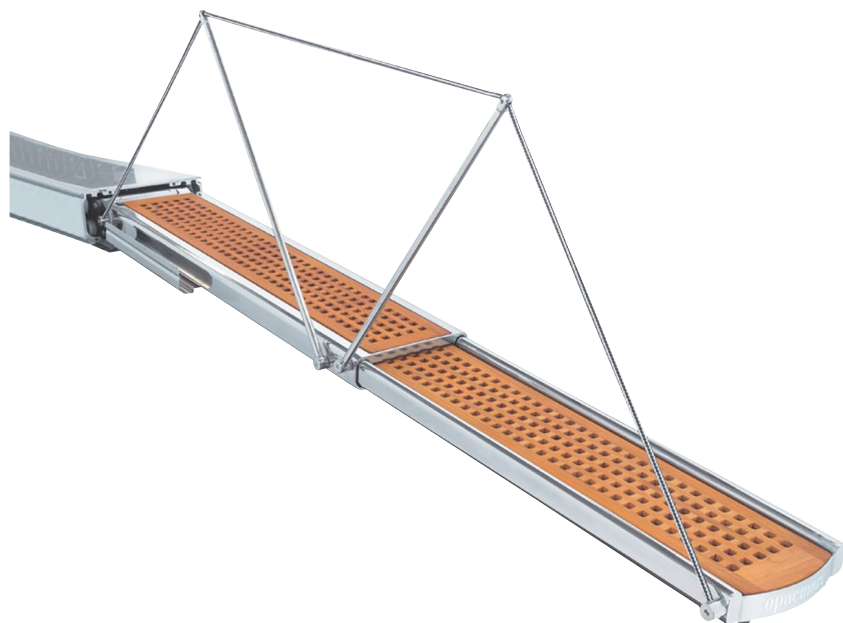

model	N. elements	A (mm/inch)	B (mm/inch)	C (mm/inch)	F (mm/inch)	H (mm/inch)	L (mm/inch)	α	β	lifting standard (kg/lbs)	lifting optional (kg/lbs)	weight (kg/lbs)
1011/25	1	2510 99"	3020 119"	--	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	160/360	--	145/320
1011/30	1	3010 119"	3420 135"	--	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	160/360	--	170/375
1002/25	2	2505 99"	2140 84"	--	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	250/550	235/520
1002/29	2	2875 113"	2340 92"	--	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	250/550	240/530
1041/26	2	2545 100"	1930 76"	--	260 10"	156 6 ¹ / ₈ "	400 16" 450 18"	20°	16°	--	--	154/340
1041/29	2	2860 113"	2110 83"	--	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	--	170/375
1041/32	2	3190 125"	2300 91"	--	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	--	179/395
1141/26	2	2550 100"	2110 83"	300 11 ⁴ / ₅ "	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	--	175/400
1141/29	2	2890 114"	2300 91"	350 13 ⁴ / ₅ "	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	--	183/410
1141/32	2	3170 125"	2400 95"	300 11 ⁴ / ₅ "	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	--	194/430
1141/35	2	3490 137"	2600 102"	300 11 ⁴ / ₅ "	260 10"	156 6 ¹ / ₈ "	450 18"	20°	16°	--	--	217/480
1102/27	2	2715 107"	2340 92"	200 7 ⁷ / ₈ "	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	250/550	195/430
1102/31	2	3100 122"	2540 100"	200 7 ⁷ / ₈ "	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	250/550	225/490
1102/34	2	3390 134"	2960 117"	500 20"	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	--	250/550
1043/27	3	2620 103"	1960 77"	--	300 11 ⁴ / ₅ "	180 7"	550 22"	18°	16°	--	--	182/400
1043/30	3	3020 119"	2040 80 ¹ / ₃ "	--	300 11 ⁴ / ₅ "	180 7"	550 22"	18°	16°	--	--	197/435
1043/33	3	3260 128"	2140 84 ¹ / ₄ "	--	300 11 ⁴ / ₅ "	180 7"	550 22"	18°	16°	--	--	208/455
1003/27	3	2690 106"	1940 76"	--	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	200/440	210/460
1003/30	3	3020 119"	2040 80 ¹ / ₃ "	--	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	200/440	225/495
1003/33	3	3260 128"	2140 84"	--	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	200/440	240/530
1033/27	3	2690 106"	1960 77"	--	300 11 ⁴ / ₅ "	195 7 ² / ₃ "	550 22"	18°	16°	--	--	198/435
1033/30	3	3020 119"	2040 80 ¹ / ₃ "	--	300 11 ⁴ / ₅ "	195 7 ² / ₃ "	550 22"	18°	16°	--	--	212/465
1033/33	3	3260 128"	2140 84 ¹ / ₄ "	--	300 11 ⁴ / ₅ "	195 7 ² / ₃ "	550 22"	18°	16°	--	--	255/500
1103/29	3	2900 114"	2140 84"	200 7 ⁷ / ₈ "	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	150/330	232/510
1103/35	3	3460 136"	2340 92"	200 7 ⁷ / ₈ "	300 11 ⁴ / ₅ "	230 9"	550 22"	15°	15°	--	150/330	275/600
1143/30	3	2920 115"	2260 89"	300 11 ⁴ / ₅ "	300 11 ⁴ / ₅ "	180 7"	550 22"	18°	16°	--	--	203/450
1143/33	3	3320 131"	2340 92"	300 11 ⁴ / ₅ "	300 11 ⁴ / ₅ "	180 7"	550 22"	18°	16°	--	--	216/475
1133/29	3	2930 115 ¹ / ₂ "	2040 80 ³ / ₁₀ "	200 7 ⁷ / ₈ "	300 11 ⁴ / ₅ "	195 7 ² / ₃ "	550 22"	18°	16°	--	--	200/440
1133/35	3	3460 136"	2340 92"	200 7 ⁷ / ₈ "	300 11 ⁴ / ₅ "	195 7 ² / ₃ "	550 22"	18°	16°	--	--	225/560

Model 1041/1141 with L.BOX 400 mm are available only with manual stanchions.

- These models are not available with different box widths.

Available box widths (Optional)	
L_box (mm/inch)	F (mm/inch)
510 20"	260 10 ¹ / ₄ "
550 22"	300 11 ⁴ / ₅ "
590 23 ¹ / ₄ "	340 13 ² / ₅ "
660 26"	410 16 ¹ / ₆ "
710 28"	460 18"