


BOX GANGWAYS extension 4500 mm to 5800 mm, model 1002/03 and 1102/03/22/33/43, H box: 180 mm to 230 mm

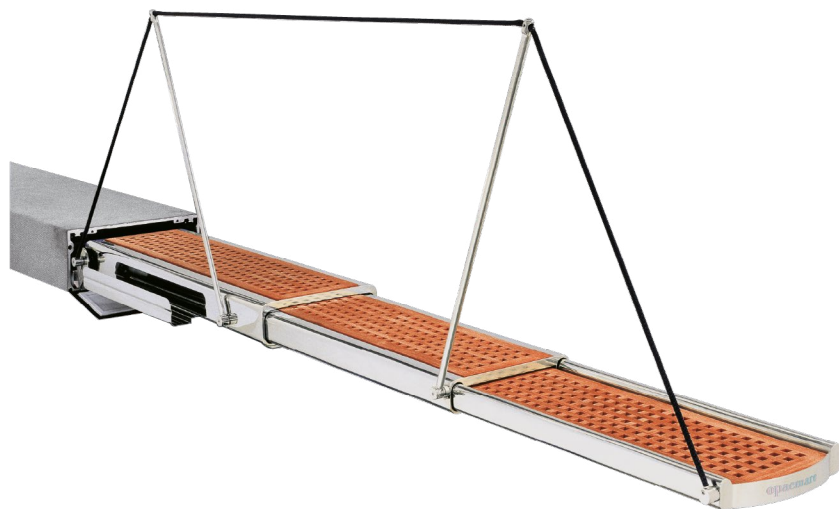

model	N. elements	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	F (mm/ inch)	H (mm/ inch)	L (mm/ inch)	α	β	lifting standard (kg/lbs)	lifting optional (kg/lbs)	weight (kg/lbs)
1122/45	2	4500 177"	3500 138"	300 11 ³ / ₈ "	300 11 ³ / ₈ "	210 8 ¹ / ₈ "	550 22"	18°	18°	--	--	376/830
1122/47	2	4705 185"	3760 148"	300 11 ³ / ₈ "	300 11 ³ / ₈ "	210 8 ¹ / ₈ "	550 22"	18°	18°	--	--	390/860
1102/46*	2	4600 181"	3840 151"	600 24"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	430/950
1102/47*	2	4700 185"	3680 145"	200 7 ⁷ / ₈ "	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	453/1000
1102/50*	2	5015 197"	4070 160"	600 24"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	490/1080
1102/52*	2	5200 205"	4040 159"	200 7 ⁷ / ₈ "	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	526/1160
1102/56*	2	5645 222"	4400 173"	600 24"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	578/1270
1002/50*	2	5040 199"	3840 151"	--	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	461/1015
1003/45	3	4500 177"	2800 110"	--	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	384/845
1003/50*	3	5000 197"	3200 126"	--	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	430/950
1143/45	3	4520 178"	3180 125"	700 27 ¹ / ₂ "	300 11 ³ / ₈ "	180 7"	550 22"	18°	16°	--	--	314/690
1103/45	3	4540 179"	3000 118"	400 16"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	150/330	371/820
1103/47	3	4710 186"	3340 131"	600 24"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	407/900
1103/50*	3	5040 199"	3440 136"	500 20"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	440/970
1103/53*	3	5295 208"	3350 132"	300 12"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	455/1000
1103/54*	3	5400 213"	4100 161"	1350 53"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	497/1095
1103/56	3	5605 220"	3800 149"	600 24"	300 11 ³ / ₈ "	230 9"	590 23 ¹ / ₄ "	15°	15°	--	--	510/1125
1103/58*	3	5800 228"	4100 161"	800 32"	300 11 ³ / ₈ "	230 9"	550 22"	15°	15°	--	--	542/1190
1133/47	3	4737 186"	3200 126"	600 24"	300 11 ³ / ₈ "	195 7 ⁷ / ₈ "	550 22"	18°	16°	--	--	385/849

Tender lifting customisation can be required on models 1002/1003/1102/1103

This gangway allows the boarding of 150 Kg / 330 lbs maximum (one person at a time).

A= maximum length of gangway outside of the box

B= box length

C= distance between the gangway hinges and the box


H= box height

L= box width

α and β = the total angle the gangway can achieve.

*Automatic stanchions are not available.

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

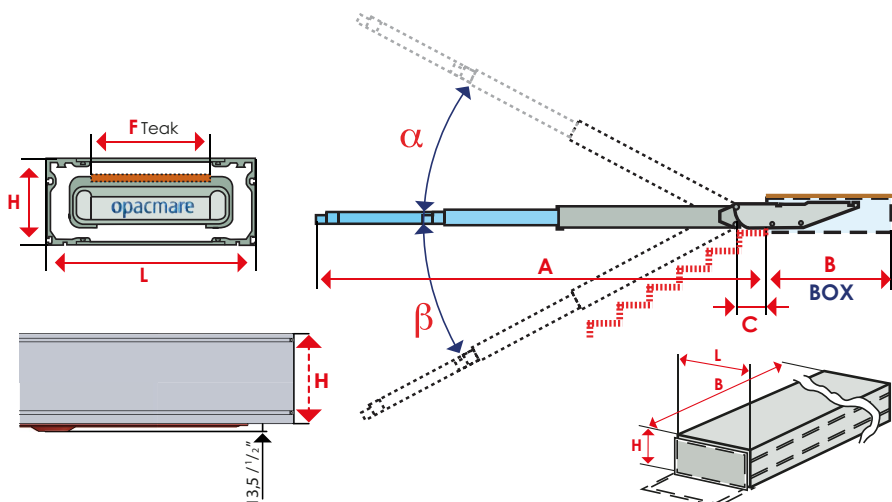

Available box widths (Optional)	
L_box (mm/inch)	F (mm/inch)
510 20"	260 10 ¹ / ₄ "
550 22"	300 11 ³ / ₈ "
590 23 ¹ / ₄ "	340 13 ³ / ₈ "
660 26"	410 16 ¹ / ₈ "
710 28"	460 18"