


STAINLESS STEEL SLEWING GANGWAYS 1843/49

extension 2240 mm to 3090 mm

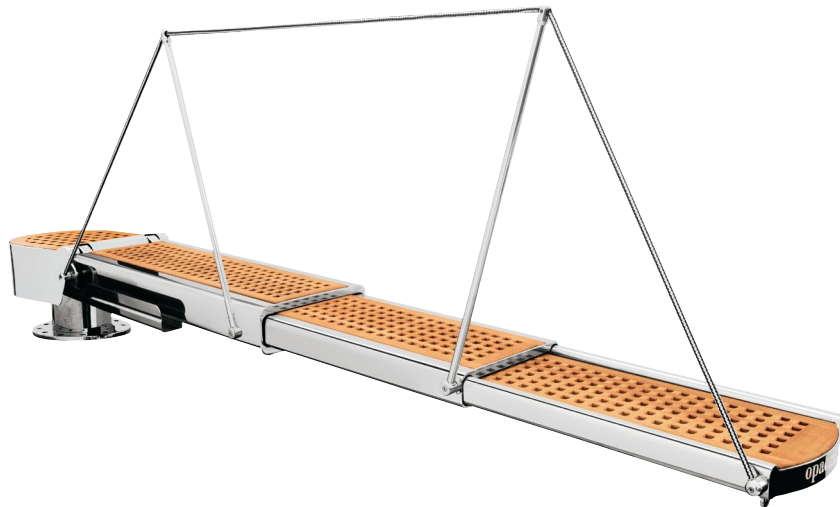

model	X (mm/inch)	Y (mm/inch)	C (mm/inch)	E (mm/inch)	α	β	rotation standard (kg/lbs)	weight (kg/lbs)
1849/23	2240 88"	1520 60"	200 7 ⁷ / ₈ "	301 11 ²⁷ / ₃₂ "	18°	15°	180°	95/210
1849/26	2620 103"	1725 67 ⁹ / ₁₀ "	200 7 ⁷ / ₈ "	301 11 ²⁷ / ₃₂ "	18°	15°	180°	105/230
1843/27	2660 105"	1460 57"	200 7 ⁷ / ₈ "	301 11 ²⁷ / ₃₂ "	18°	15°	180°	172/380
1849/29	2910 115"	1880 74"	200 7 ⁷ / ₈ "	301 11 ²⁷ / ₃₂ "	18°	15°	180°	120/265
1843/31	3090 121 ³ / ₅ "	1650 60"	200 7 ⁷ / ₈ "	301 11 ²⁷ / ₃₂ "	18°	15°	180°	190/420

This gangway allows the boarding of 150 Kg / 330 lbs maximum (one person at a time).

X= maximum length of gangway when extended

Y= minimum length of gangway when retracted

C= rotational range of the base unit

E= height of the rotating base

α and β = the total angle the gangway can achieve.

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

