


ALUMINIUM ROTATING GANGWAYS 3453/3893/93S

DOLPHIN TWISTER extension 1560 mm to 3390 mm

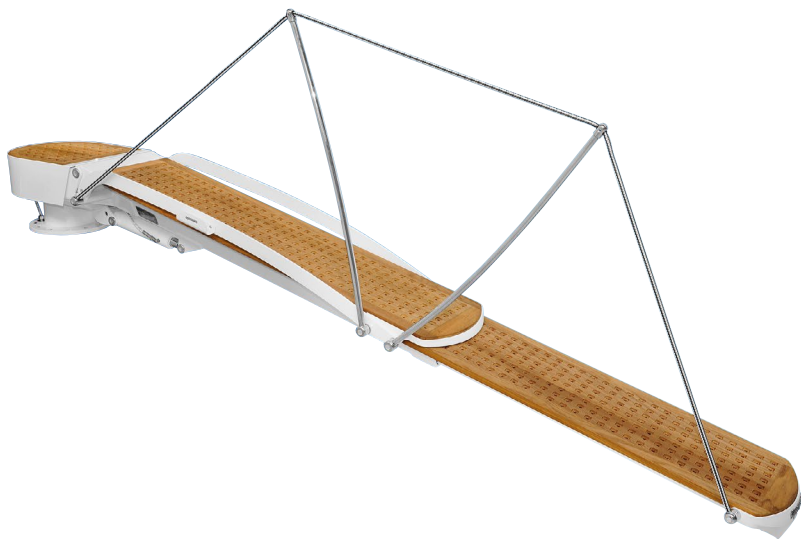

model	N. elements	X (mm/ inch)	Y (mm/ inch)	C (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	α	β	rotation standard (kg/lbs)	rotation optional (kg/lbs)	lifting standard (kg/lbs)	weight (kg/lbs)
3453/15	1	1560 61"	--	190 7 ¹ / ₂ "	247 9 ³ / ₄ "	360 14 ¹ / ₅ "	Ø350 13 ³ / ₄ "	25°	-	180°	--	--	74/160
3453/20	1	2010 79"	--	190 7 ¹ / ₂ "	247 9 ³ / ₄ "	360 14 ¹ / ₅ "	Ø350 13 ³ / ₄ "	25°	-	180°	--	--	81/180
3453/24	1	2405 95"	--	190 7 ¹ / ₂ "	247 9 ³ / ₄ "	360 14 ¹ / ₅ "	Ø350 13 ³ / ₄ "	25°	-	180°	--	--	88/195
3893/28	2	2840 111 ⁴ / ₅ "	1940 76 ¹ / ₃ "	205 8 ¹ / ₈ "	225 8 ¹¹ / ₁₃ "	360 14 ¹ / ₅ "	Ø300 11 ⁴ / ₅ "	20°	20°	180°	359°	--	119/262
3893/30	2	3030 119 ³ / ₁₀ "	2000 78 ³ / ₄ "	205 8 ¹ / ₈ "	225 8 ¹¹ / ₁₃ "	360 14 ¹ / ₅ "	Ø300 11 ⁴ / ₅ "	20°	20°	180°	359°	--	123/271
3893/33	2	3390 133 ¹ / ₂ "	2190 86 ¹ / ₅ "	205 8 ¹ / ₈ "	225 8 ¹¹ / ₁₃ "	360 14 ¹ / ₅ "	Ø300 11 ⁴ / ₅ "	20°	20°	180°	359°	--	128/282
3893S/28	2	2840 111 ⁴ / ₅ "	1940 76 ¹ / ₃ "	205 8 ¹ / ₈ "	225 8 ¹¹ / ₁₃ "	360 14 ¹ / ₅ "	Ø300 11 ⁴ / ₅ "	40°	22°	180°	359°	250/550	128/282
3893S/30	2	3030 119 ³ / ₁₀ "	2000 78 ³ / ₄ "	205 8 ¹ / ₈ "	225 8 ¹¹ / ₁₃ "	360 14 ¹ / ₅ "	Ø300 11 ⁴ / ₅ "	40°	22°	180°	359°	200/440	135/298
3893S/33	2	3390 133 ¹ / ₂ "	2190 86 ¹ / ₅ "	205 8 ¹ / ₈ "	225 8 ¹¹ / ₁₃ "	360 14 ¹ / ₅ "	Ø300 11 ⁴ / ₅ "	40°	22°	180°	359°	150/330	142/313

This gangway allows passengers boarding only, up to 120kg/270lbs (one person at a time).
No tender lifting allowed.

X= maximum length of gangway when extended
Y= minimum length of gangway when retracted
C= rotational range of the base unit
E= height of the rotating base
 α and β = the total angle the gangway can achieve

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

