


MULTIFUNCTION GANGWAYS 3610/11

extension 4385 mm to 5885 mm, H box: 290 mm to 400 mm

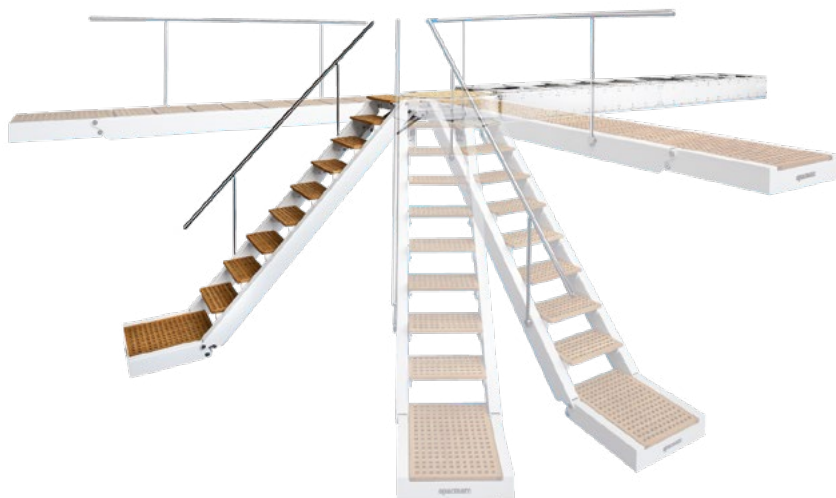

model	A (mm/inch)	B (mm/inch)	C (mm/inch)	D (mm/inch)	G (mm/inch)	L (mm/inch)	H (mm/inch)	β	n° steps	weight (kg/lbs)
- 3610/44	4385 173"	5400 213"	600 23 ²³ / ₃₂ "	2110 83"	570 22 ¹¹ / ₂ "	900 35 ²⁵ / ₃₂ "	290 11 ²⁵ / ₃₂ "	52°	8	1315/2900
- 3610/59	5885 232"	6900 272"	600 23 ²³ / ₃₂ "	3295 130"	570 22 ¹¹ / ₂ "	900 35 ²⁵ / ₃₂ "	290 11 ²⁵ / ₃₂ "	52°	13	1660/3660
3611/45	5120 210 ¹¹ / ₁₆ "	7230 284 ³ / ₅ "	980 38 ¹¹ / ₂ "	1875 73 ⁴ / ₅ "	770 30 ¹¹ / ₃₂ "	1100 43 ³ / ₁₆ "	400 15 ³ / ₄ "	45°	9	3500/7716

Optional box: weathertight, watertight and certificated watertight.

Gangway models with H.BOX 290mm can be made with stainless steel box H250mm (OPTIONAL).

Model 3610: This gangway allows passengers boarding only, up to 150 Kg / 330 lbs (one person at a time).

Model 3611: This gangway allows passengers boarding only, up to 300 Kg / 660 lbs (one person at a time).

No tender lifting allowed.

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

- LEAD TIME TO BE CONFIRMED

