


# MULTIFUNCTION GANGWAYS 3625

extension 1110 mm to 1870 mm, H box: 156 mm to 195 mm

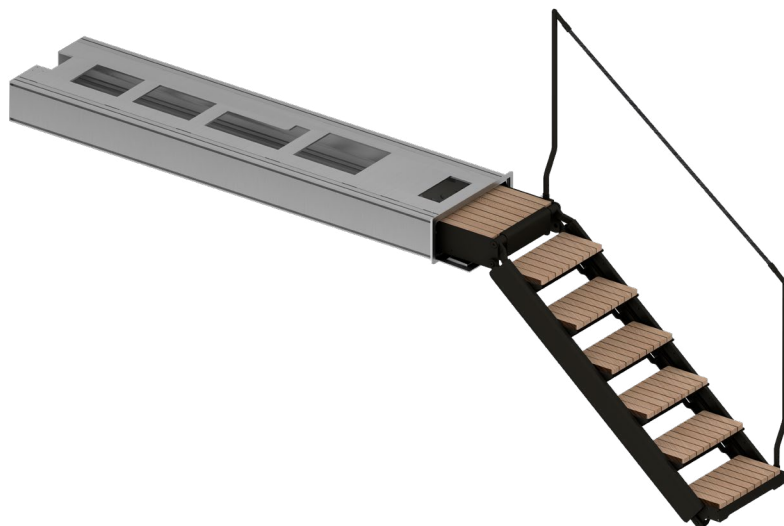

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	G (mm/ inch)	L (mm/ inch)	H (mm/ inch)	α	β	n° steps
3625/12	1110 43 <sup>3</sup> / <sub>5</sub> "	1570 61 <sup>4</sup> / <sub>5</sub> "	316 12 <sup>2</sup> / <sub>5</sub> "	450 17 <sup>3</sup> / <sub>5</sub> "	450 17 <sup>3</sup> / <sub>5</sub> "	345 13 <sup>1</sup> / <sub>2</sub> "	446 17 <sup>1</sup> / <sub>2</sub> "	156 6"	40°	40°	4
3625/14	1350 53"	1770 69 <sup>3</sup> / <sub>5</sub> "	316 12 <sup>2</sup> / <sub>5</sub> "	600 23 <sup>3</sup> / <sub>5</sub> "	600 23 <sup>3</sup> / <sub>5</sub> "	345 13 <sup>1</sup> / <sub>2</sub> "	446 17 <sup>1</sup> / <sub>2</sub> "	156 6"	40°	40°	5
3625/17	1615 63 <sup>3</sup> / <sub>5</sub> "	2050 80 <sup>7</sup> / <sub>10</sub> "	316 12 <sup>2</sup> / <sub>5</sub> "	770 30 <sup>3</sup> / <sub>10</sub> "	770 30 <sup>3</sup> / <sub>10</sub> "	345 13 <sup>1</sup> / <sub>2</sub> "	446 17 <sup>1</sup> / <sub>2</sub> "	156 6"	40°	40°	6
3625H19.20	1855 73"	2300 90 <sup>1</sup> / <sub>2</sub> "	305 12"	935 36 <sup>4</sup> / <sub>5</sub> "	930 36 <sup>3</sup> / <sub>5</sub> "	445 17 <sup>1</sup> / <sub>2</sub> "	550 21 <sup>3</sup> / <sub>5</sub> "	195 7 <sup>7</sup> / <sub>10</sub> "	50°	50°	6
3625/20	1870 73 <sup>3</sup> / <sub>5</sub> "	2300 90 <sup>1</sup> / <sub>2</sub> "	316 12 <sup>2</sup> / <sub>5</sub> "	930 36 <sup>3</sup> / <sub>5</sub> "	930 36 <sup>3</sup> / <sub>5</sub> "	345 13 <sup>1</sup> / <sub>2</sub> "	446 17 <sup>1</sup> / <sub>2</sub> "	156 6"	40°	40°	7

This gangway allows the boarding of 120 Kg / 264,5 lbs maximum (one person at a time).

The watertight box option modifies the dimensions of the box, which will be communicated on request.

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

