
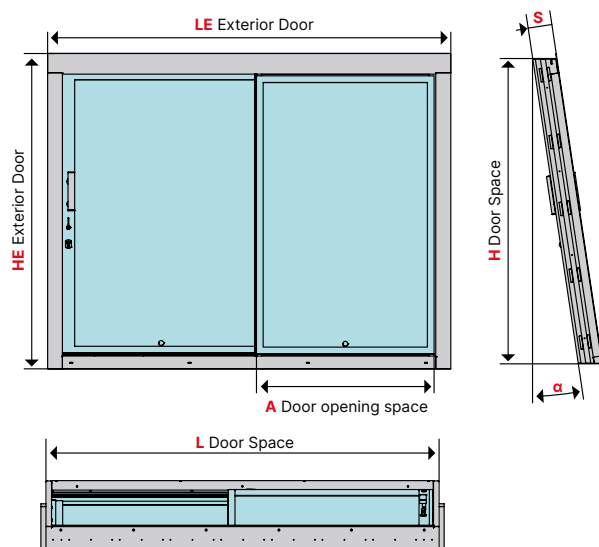


Two wings door 2013

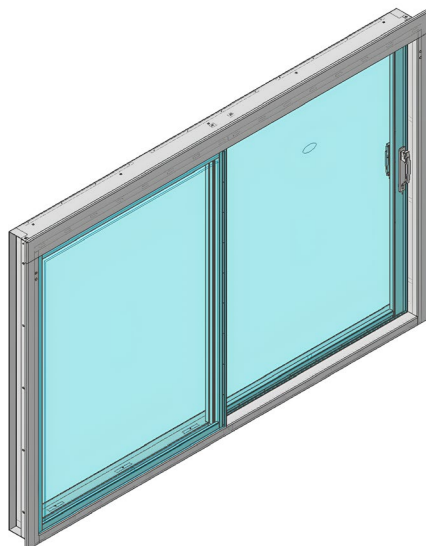

model	A (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	α	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2004
2013/05	955 37 ¹ / ₂	2325 91 ³ / ₈	2385 94"	1810 71 ¹ / ₈	1890 74 ³ / ₈	145 5 ⁷ / ₁₆	8,5°	8 3/16"	mod.7550	Sx→Dx	CAT 3
2013/06	625 24 ³ / ₈	1535 60 ¹ / ₂	1585 62 ¹ / ₈	1825 71 ¹ / ₈	--	185 7 ¹ / ₈	-	8 3/16"	mod.7550	Sx→Dx	CAT 3
2013/07	625 24 ³ / ₈	1535 60 ¹ / ₂	1585 62 ¹ / ₈	1825 71 ¹ / ₈	--	175 6 ⁷ / ₈	-	8 3/16"	mod.7550	Sx←Dx	CAT 3
2013/08	1290 50 ³ / ₈	2885 113 ³ / ₈	3005 118 ³ / ₁₆	1820 71 ¹ / ₈	2040 80 ³ / ₁₆	145 5 ⁷ / ₁₆	3,3°	8 3/16"	mod.7550	Sx→Dx	CAT 3
2013/09	1065 41 ³ / ₈	2410 95"	2540 99 ⁹ / ₁₆	1820 71 ¹ / ₈	2040 80 ³ / ₁₆	135 5 ³ / ₈	3,3°	8 3/16"	mod.7550	Sx←Dx	CAT 3
2013/11	600 23 ³ / ₈	1555 61 ¹ / ₈	1615 63 ¹ / ₈	1965 77 ¹ / ₈	1990 78 ³ / ₁₆	185 7 ¹ / ₈	-	12,5 1/2"	mod.7550	Sx←Dx	CAT 3
2013/12	655 25 ⁷ / ₁₆	1770 69 ⁷ / ₁₆	--	2040 80 ³ / ₁₆	2065 81 ³ / ₁₆	185 7 ¹ / ₈	-	12,5 1/2"	mod.7550	Sx→Dx	CAT 3
2013/13	870 34 ³ / ₁₆	2055 80 ⁹ / ₁₆	2085 82"	2275 89 ³ / ₈	--	185 7 ¹ / ₈	-	10 3/8"	mod.7550	Sx→Dx	CAT 3
2013/14	870 34 ³ / ₁₆	2055 80 ⁹ / ₁₆	2085 82"	2275 89 ³ / ₈	--	185 7 ¹ / ₈	-	10 3/8"	mod.7550	Sx←Dx	CAT 3
2013/15	1290 50 ³ / ₈	2870 13 ¹ / ₁₆	2980 117 ¹ / ₈	1920 75 ³ / ₈	1980 77 ⁹ / ₁₆	190 7 ¹ / ₂	-	14 1/2"	mod.7550	Sx←Dx	CAT 3
2013/16	595 23 ¹ / ₂	1695 66 ⁷ / ₁₆	--	2020 79 ³ / ₈	--	220 8 ⁵ / ₁₆	-	10 3/8"	mod.7550	Sx←Dx	CAT 3
2013/17	735 29"	1805 71"	1850 72 ¹ / ₈	2165 85 ¹ / ₈	2215 87 ¹ / ₁₆	140 5 ³ / ₈	-	13 1/2"	mod.7550	Sx→Dx	CAT 2
2013/18	735 29"	1805 71"	1850 72 ¹ / ₈	2165 85 ¹ / ₈	2215 87 ¹ / ₁₆	140 5 ³ / ₈	-	13 1/2"	mod.7550	Sx←Dx	CAT 2
2013/19	610 24"	1610 63 ¹ / ₈	1650 65"	2040 80 ³ / ₁₆	2075 81 ¹ / ₁₆	120 4 ³ / ₄	-	11.5 1/16"	mod.7550	Sx←Dx	CAT 3

One fixed wing and one sliding wing.

The doors are subject to quality control tests to comply with ISO 12216.2004 standards.

NOTE:

Sx→Dx / Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

