


Three wings door 2017

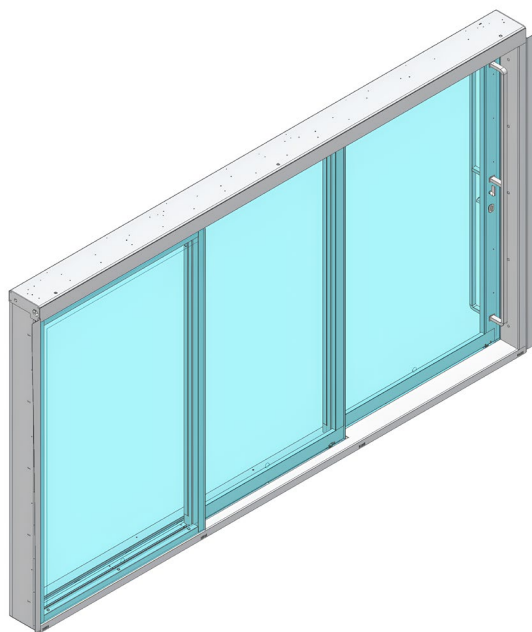

| model | A (mm/ inch) | B (mm/ inch) | L (mm/ inch) | Le (mm/ inch) | H (mm/ inch) | He (mm/ inch) | S (mm/ inch) | glass (mm/inch) | handle standard | opening | weather proof ISO 12216:2004 |
|---------|---|---|--|--|---|---|---------------------------------------|--------------------|--------------------|---------|---------------------------------|
| 2017/03 | 940 36 ⁹ / ₁₀ | 1905 75" | 3185 125 ³ / ₁₀ | 3265 128 ³ / ₁₀ | 1990 78 ³ / ₁₀ | 2060 81 ¹ / ₅ | 240 9 ³ / ₁₀ | 7 "3/10 | mod.7550 | Sx←Dx | CAT 3 |
| 2017/04 | 1095 43 ¹ / ₅ | 2230 87 ⁹ / ₁₀ | 3660 144 ¹ / ₁₀ | 3795 149 ³ / ₁₀ | 2125 83 ³ / ₁₀ | - | 240 9 ³ / ₁₀ | 7 "3/10 | mod.7550 | Sx←Dx | CAT 3 |
| 2017/07 | 1380 54 ³ / ₁₀ | 2920 115" | 4505 177 ¹ / ₁₀ | 4635 182 ¹ / ₂ | 2115 83 ³ / ₁₀ | 2170 85 ³ / ₁₀ | 240 9 ³ / ₁₀ | 7 "3/10 | mod.7550 | Sx←Dx | CAT 3 |
| 2017/12 | 980 38 ⁷ / ₁₀ | 1975 77 ³ / ₁₀ | 3220 126 ⁴ / ₁₀ | 3470 136 ³ / ₁₀ | 2000 78 ⁷ / ₁₀ | 2060 81 ¹ / ₁₀ | 235 9 ³ / ₁₀ | 7 "3/10 | mod.7550 | Sx←Dx | CAT 3 |
| 2017/13 | 955 37 ¹ / ₂ | 1935 76 ¹ / ₁₀ | 3160 124 ³ / ₁₀ | 3235 127 ¹ / ₁₀ | 1945 76 ³ / ₁₀ | 2100 82 ⁷ / ₁₀ | 185 7 ³ / ₁₀ | 8 "3/10" | mod.7550 | Sx←Dx | CAT 3 |
| 2017/14 | 745 29 ² / ₁₀ | 1650 65" | 2545 100 ¹ / ₁₀ | 2620 103 ¹ / ₁₀ | 1845 72 ³ / ₁₀ | 1950 76 ³ / ₁₀ | 330 13" | 8 "3/10" | mod.7550 | Sx←Dx | CAT 3 |


One fixed wing and two sliding wings.

The doors are subject to quality control tests to comply with ISO 12216.2004 standards.


NOTE:

Sx→Dx, Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

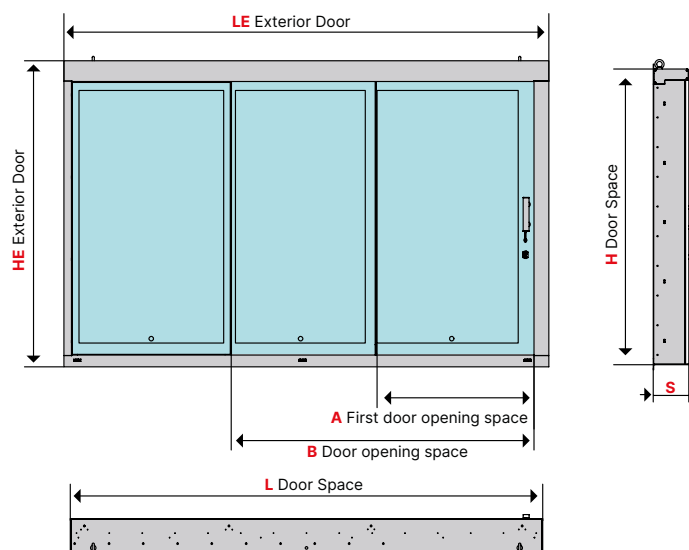

FIRST OPENING



OPEN

