
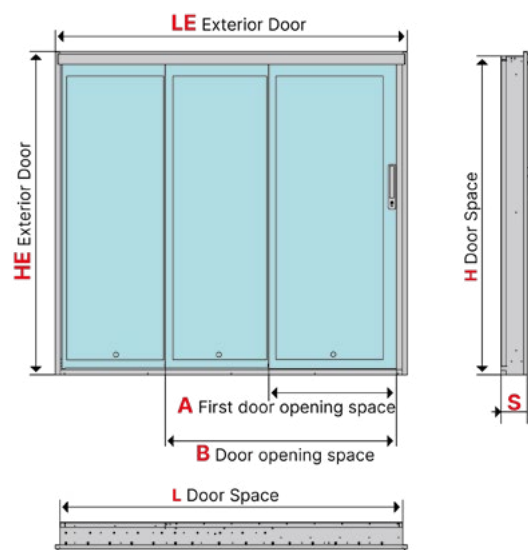


Three wings door series 203

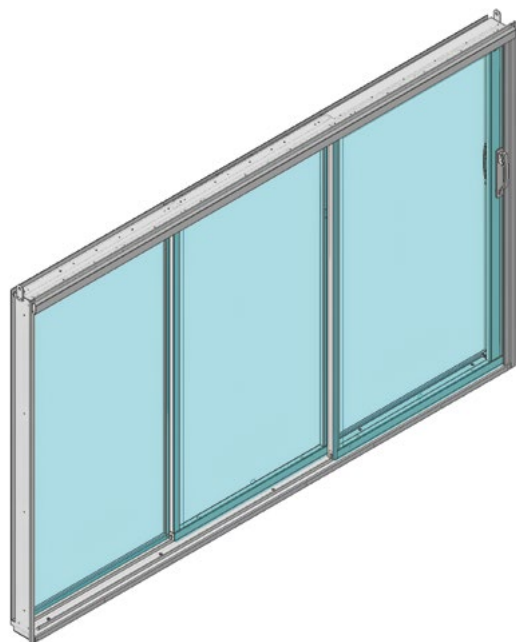

model	A (mm/ inch)	B (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2023
203N/20	1035 40 ⁹ / ₁₆	2080 81 ⁴ / ₁₆	3300 129 ⁹ / ₁₆	3360 132 ² / ₁₆	2135 84 ¹ / ₁₆	2170 85 ² / ₁₆	140 5 ³ / ₁₆	8 ³ / ₁₆ "	mod.7550	Sx←Dx	CAT 4
203P/21	665 26 ¹ / ₁₆	1270 50 ¹ / ₁₆	2135 84"	2195 86 ² / ₁₆	1990 78 ³ / ₁₆	2020 79 ² / ₁₆	165 6 ³ / ₁₆	6 1/2"	mod.7550	Sx←Dx	CAT 4
203P/22	915 36"	1840 72 ² / ₁₆	2945 116"	3010 118 ¹ / ₂	2000 78 ² / ₁₆	2030 79 ⁹ / ₁₆	160 6 ³ / ₁₆	6 1/2"	mod.7550	Sx←Dx	CAT 4
203P/23	895 35 ¹ / ₁₆	1795 70 ³ / ₁₆	2875 113 ¹ / ₁₆	2940 115 ² / ₁₆	1975 77 ⁴ / ₁₆	2005 79"	160 6 ³ / ₁₆	6 1/2"	mod.7550	Sx←Dx	CAT 4
203P/24	990 39 ¹ / ₁₆	1995 78 ¹ / ₂	3180 125 ¹ / ₁₆	3240 127 ³ / ₁₆	1965 77 ² / ₁₆	1995 78 ¹ / ₂	160 6 ³ / ₁₆	8 ³ / ₁₆ "	mod.7550	Sx←Dx	CAT 4
203P/25	885 34 ⁴ / ₁₆	1780 70 ¹ / ₁₆	2860 112 ³ / ₁₆	2920 115"	1960 77 ¹ / ₁₆	1990 78 ² / ₁₆	160 6 ³ / ₁₆	6 1/2"	mod.7550	Sx←Dx	CAT 4
203P/26	825 32 ¹ / ₂	1665 65 ¹ / ₂	2685 105 ³ / ₁₆	2740 107 ⁴ / ₁₆	1990 78 ³ / ₁₆	2015 79 ² / ₁₆	160 6 ³ / ₁₆	6 1/2"	mod.7550	Sx←Dx	CAT 4
203P/27	940 37"	1900 74 ⁴ / ₁₆	3050 120"	3110 122 ² / ₁₆	2045 80 ¹ / ₂	2075 81 ² / ₁₆	160 6 ³ / ₁₆	8 ³ / ₁₆ "	mod.7550	Sx←Dx	CAT 4
203Q/20	945 37 ¹ / ₁₆	1895 74 ³ / ₁₆	3030 119 ³ / ₁₆	3090 121 ¹ / ₁₆	2095 82 ¹ / ₂	2125 83 ² / ₁₆	140 5 ³ / ₁₆	8 ³ / ₁₆ "	mod.7550	Sx←Dx	CAT 4

One fixed wing and two sliding wings.


The doors are subject to quality control tests to comply with ISO 12216.2023 standards.

NOTE:

Sx→Dx, Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

FIRST OPENING



OPEN

