


# Three wings door 2030.IA



model	A (mm/ inch)	B (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2004
2030.IA/01	910 35 <sup>7</sup> / <sub>8</sub>	1835 72 <sup>3</sup> / <sub>8</sub>	2960 116 <sup>1</sup> / <sub>2</sub>	3040 119 <sup>7</sup> / <sub>8</sub>	2060 81 <sup>1</sup> / <sub>4</sub>	2095 82 <sup>3</sup> / <sub>8</sub>	170 6 <sup>7</sup> / <sub>8</sub>	8 3/ <sub>16</sub> "	mod. 7550	Sx↔Dx	CAT 3

**HYBRID PATIO DOOR: STAINLESS STEEL FRAME AND ALUMINIUM WINGS**  
 Manual flat door with three wings, two of which sliding and a fixed one.  
 The doors are subject to quality control tests to comply with ISO 12216.2004 standards.  
**NOTE:**  
 Sx→Dx, Sx↔Dx  
 The sliding doors opening direction is always considered from the outside of the boat.

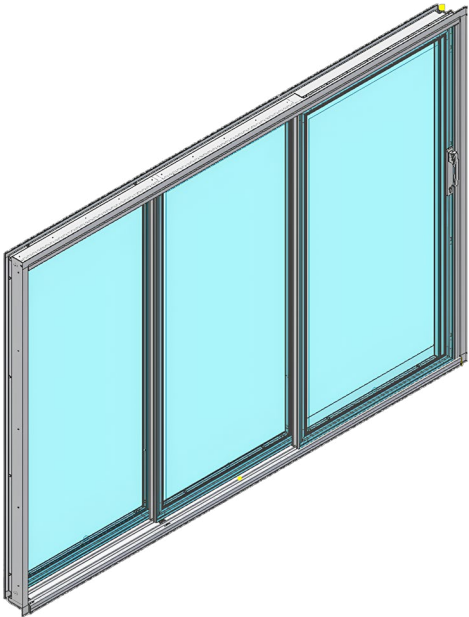