



Three wings door 2034

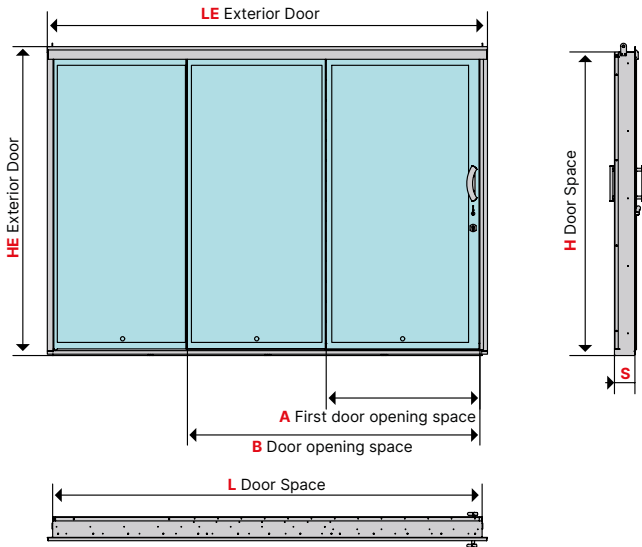

model	A (mm/ inch)	B (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2004
2034/15	935 36 ¹¹ / ₁₆ "	1830 72"	2945 115 ¹¹ / ₁₆ "	3015 118 ¹ / ₂ "	2080 81 ¹ / ₂ "	2120 83 ³ / ₈ "	150 5 ¹⁵ / ₁₆ "	8 3/ ₁₆ "	mod.7550	Sx←Dx	CAT 3
2034/25	910 35 ⁵ / ₈ "	1810 71 ³ / ₁₆ "	2945 115 ¹¹ / ₁₆ "	3015 118 ¹ / ₂ "	2080 81 ¹ / ₂ "	2095 82 ³ / ₈ "	145 5 ¹¹ / ₁₆ "	8 3/ ₁₆ "	mod.7550	Sx←Dx	CAT 3

One fixed wing and two sliding wings.
 The doors are subject to quality control tests to comply with ISO 12216.2004 standards.
 NOTE:
 Sx→Dx, Sx←Dx
 The sliding doors opening direction is always considered from the outside of the boat.

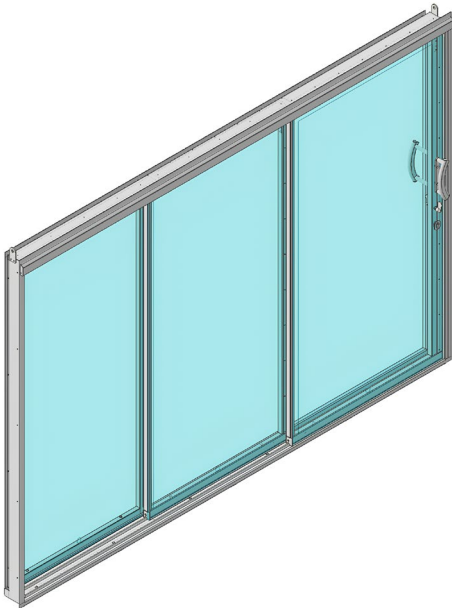