
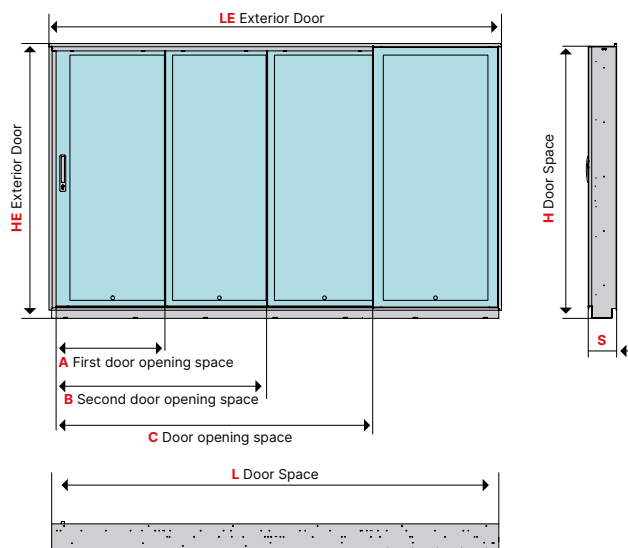



Four wings door 2055

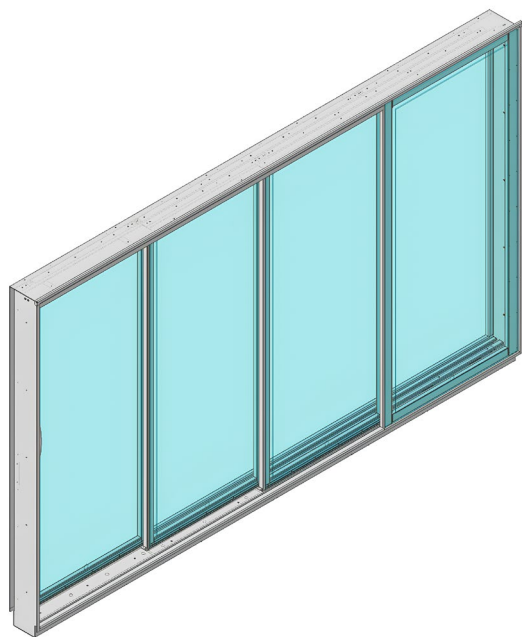

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2004
2055/25	785 30 ⁹ / ₁₆	1650 64 ⁹ / ₁₆	2565 101"	3845 151 ³ / ₁₆	3865 152 ¹ / ₁₆	2005 78 ⁹ / ₁₆	2090 82 ¹ / ₁₆	215 8 ¹ / ₂	6 ⁵ / ₁₆ "	mod.7550	Sx→Dx	CAT 3
2055/26	705 27 ⁴ / ₁₆	1490 58 ⁷ / ₁₆	2360 92 ⁸ / ₁₆	3450 135 ⁴ / ₁₆	3495 137 ³ / ₁₆	1985 78 ¹ / ₁₆	2060 81 ¹ / ₁₆	220 8 ⁷ / ₁₆	6 ⁵ / ₁₆ "	mod.7550	Sx→Dx	CAT 3
2055/27	990 38 ⁹ / ₁₆	1995 78 ¹ / ₂	--	3330 131 ¹ / ₁₆	3410 134 ¹ / ₁₆	2115 83 ³ / ₁₆	2165 85 ⁵ / ₁₆	255 10"	12,5 ¹ / ₂ "	mod.7550	Sx←Dx	CAT 2
2055/28	875 34 ¹ / ₂	1765 69 ¹ / ₂	2695 106 ³ / ₁₆	3905 153 ³ / ₁₆	--	1860 73 ³ / ₁₆	2040 80 ³ / ₁₆	315 12 ² / ₁₆	12,5 ¹ / ₂ "	mod.7550	Sx→Dx	CAT 3
2055/29	790 31 ¹ / ₁₆	1660 65 ³ / ₁₆	2550 100 ³ / ₁₆	3845 151 ³ / ₁₆	3890 153 ¹ / ₁₆	2010 79 ¹ / ₁₆	2050 80 ⁷ / ₁₆	215 8 ¹ / ₂	6 ⁵ / ₁₆ "	mod.7550	Sx←Dx	CAT 3
2055/30	1170 46 ¹ / ₁₆	2490 98 ¹ / ₁₆	3470 136 ³ / ₁₆	5115 201 ³ / ₁₆	--	2365 93 ³ / ₁₆	2665 104 ³ / ₁₆	315 12 ² / ₁₆	9 ³ / ₁₆ "	mod.7550	Sx→Dx	CAT 3
2055/31	910 35 ⁹ / ₁₆	1905 74 ⁹ / ₁₆	2995 117 ⁹ / ₁₆	4375 172 ³ / ₁₆	4420 174"	2000 78 ³ / ₁₆	2090 82 ¹ / ₁₆	225 8 ⁴ / ₁₆	8 ³ / ₁₆ "	mod.7550	Sx→Dx	CAT 3
2055/32	705 27 ⁴ / ₁₆	1525 60"	2345 92 ¹ / ₁₆	3450 135 ⁴ / ₁₆	3495 137 ³ / ₁₆	1925 75 ³ / ₁₆	2005 78 ⁹ / ₁₆	210 8 ¹ / ₁₆	6 ⁵ / ₁₆ "	mod.7550	Sx→Dx	CAT 3
2055/33	775 30 ¹ / ₂	1565 61 ³ / ₁₆	2390 94"	3430 135"	3505 138"	1910 75 ⁵ / ₁₆	2065 81 ³ / ₁₆	385 15 ¹ / ₁₆	6 ⁵ / ₁₆ "	mod.7550	Sx←Dx	CAT 3
2055/34	1045 41 ¹ / ₁₆	2110 83"	3205 126 ³ / ₁₆	4705 185 ³ / ₁₆	--	1960 77 ⁵ / ₁₆	2140 84 ¹ / ₁₆	290 11 ² / ₁₆	13,5 ¹ / ₂ "	mod.7550	Sx→Dx	CAT 3
2055/36	885 34 ⁹ / ₁₆	1790 70 ¹ / ₂	2730 107 ¹ / ₂	3825 150 ³ / ₁₆	3890 153 ¹ / ₁₆	1925 75 ³ / ₁₆	2035 80 ⁷ / ₁₆	225 8 ⁴ / ₁₆	6 ⁵ / ₁₆ "	mod.7550	Sx→Dx	CAT 3

One fixed wing and three sliding wings.
The doors are subject to quality control tests to comply with ISO 12216.2004 standards.
NOTE:
Sx→Dx, Sx←Dx
The sliding doors opening direction is always considered from the outside of the boat.

FIRST OPENING



OPEN

