
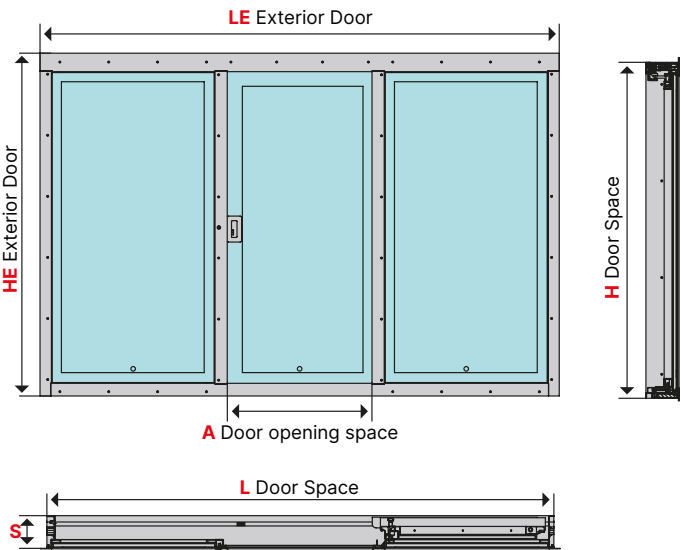


# Three wings door 2062.04/11

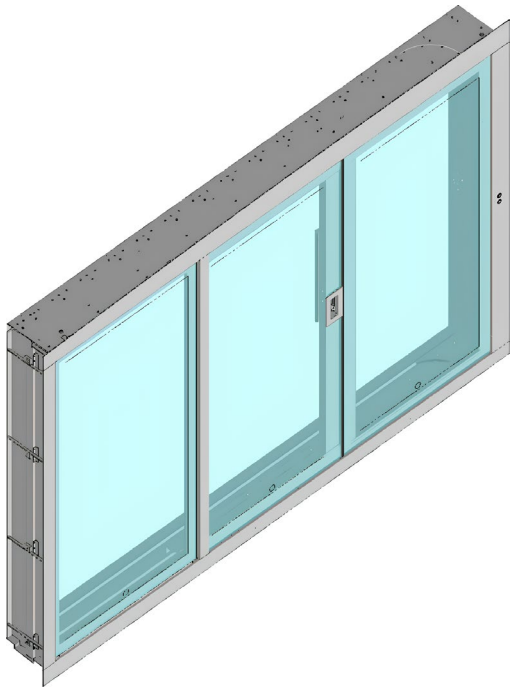

model	A (mm/inch)	L (mm/inch)	Le (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2004
2062.04	945 37 <sup>1</sup> / <sub>8</sub>	3320 130 <sup>3</sup> / <sub>16</sub>	3400 133 <sup>4</sup> / <sub>5</sub>	2200 86 <sup>3</sup> / <sub>8</sub>	2245 88 <sup>1</sup> / <sub>2</sub>	215 8 <sup>1</sup> / <sub>2</sub>	21,5 4 <sup>1</sup> / <sub>8</sub> "	mod.7550	Sx→Dx	CAT 2
2062.11	945 37 <sup>1</sup> / <sub>8</sub>	3320 130 <sup>3</sup> / <sub>16</sub>	3400 133 <sup>4</sup> / <sub>5</sub>	2200 86 <sup>3</sup> / <sub>8</sub>	2245 88 <sup>1</sup> / <sub>2</sub>	215 8 <sup>1</sup> / <sub>2</sub>	21,5 4 <sup>1</sup> / <sub>8</sub> "	mod.7550	Sx←Dx	CAT 2

Three wings sliding door with two fixed wings and one semiautomatic rototraslating central wing opening towards the center of the boat. Wings are flush in closed position. The doors are subject to quality control tests to comply with ISO 12216.2004 standards.

NOTE:  
Sx→Dx, Sx←Dx  
The sliding doors opening direction is always considered from the outside of the boat.

