


# Five wings door 2065/23

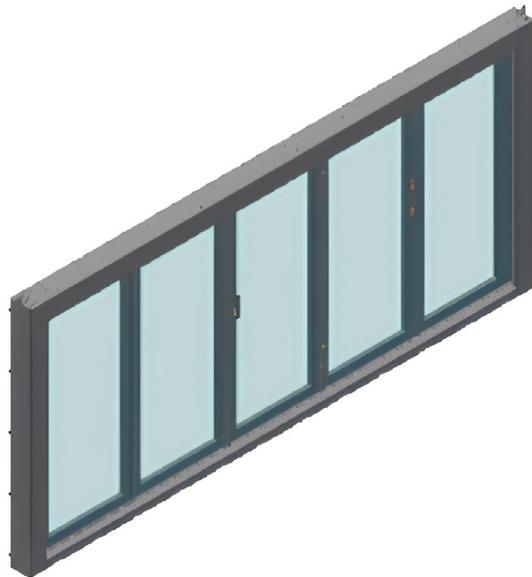

model	A (mm/inch)	B (mm/inch)	L (mm/inch)	H (mm/inch)	S (mm/inch)	glass (mm/inch)	handle standard	weather proof ISO 12216:2023
2065/23	930 36 3/8	4240 166 9/10	5000 196 9/10	2315 91 1/10	215 8 1/2	13,5 1/2"	mod.7550	CAT 3

Five-wing door, one of which is central and opens inwards.  
 To totally open the door, it is necessary to activate the side wings mechanism and switch from sliding to hinge outwards opening and slide the rights sliding wing rightwards and the left sliding wing leftwards.  
 The two central wings must make a double movement, sliding sideways first, then rotating and folding on the external wings.

The doors are subject to quality control tests to comply with ISO 12216.2023 standards.

