


# Four wings door 2066



| model   | A (mm/inch)      | L (mm/inch)       | Le (mm/inch)      | H (mm/inch)      | He (mm/inch)     | S (mm/inch)    | glass<br>(mm/inch) | handle<br>standard | weather proof<br>ISO 12216:2004 |
|---------|------------------|-------------------|-------------------|------------------|------------------|----------------|--------------------|--------------------|---------------------------------|
| 2066.16 | 1440<br>57"      | 3150<br>124"      | --                | 1962<br>77"      | --               | 150<br>6"      | 12 1/2"            | mod.7550           | CAT 2                           |
| 2066.18 | 1255<br>49 3/8"  | 2800<br>110"      | --                | 1765<br>69 1/2"  | --               | 191<br>7 1/2"  | 10 3/8"            | mod.7550           | CAT 2                           |
| 2066.25 | 1175<br>46 1/10" | 2580<br>101 3/8"  | --                | 1910<br>75 1/8"  | --               | 180<br>7 1/10" | 13,5 1/2"          | mod.7550           | CAT 2                           |
| 2066.27 | 1060<br>41 3/8"  | 2355<br>92 7/10"  | --                | 1875<br>73 4/5"  | --               | 190<br>7 1/2"  | 13,5 1/2"          | mod.7550           | CAT 2                           |
| 2066.28 | 1255<br>49 3/8"  | 2800<br>111 1/8"  | --                | 1940<br>76 3/8"  | --               | 190<br>7 1/2"  | 10 3/8"            | mod.7550           | CAT 2                           |
| 2066.29 | 1160<br>45 7/10" | 2580<br>101 3/8"  | --                | 1910<br>75 1/8"  | --               | 180<br>7 1/10" | 13,5 1/2"          | mod.7550           | CAT 2                           |
| 2066.31 | 1340<br>52 7/10" | 2985<br>117 3/8"  | 3065<br>120 7/10" | 1905<br>75"      | 1930<br>76"      | 152<br>6"      | 12 1/2"            | mod.7550           | CAT 2                           |
| 2066.32 | 1460<br>57 3/8"  | 3150<br>124"      | --                | 1950<br>77"      | --               | 190<br>7 1/2"  | 16,5 1/2"          | mod.7550           | CAT 2                           |
| 2066.33 | 1355<br>53 3/10" | 2980<br>117 3/10" | --                | 1940<br>76 3/8"  | 2015<br>79 3/10" | 180<br>7 1/10" | 13,5 1/2"          | mod.7550           | CAT 2                           |
| 2066/34 | 1445<br>56 4/5"  | 3150<br>123 9/10" | --                | 1950<br>76 4/5"  | --               | 190<br>7 1/2"  | 16,5 1/2"          | mod.7550           | CAT 2                           |
| 2066/47 | 2000<br>78 4/5"  | 4280<br>168 1/2"  | --                | 2010<br>79 1/10" | --               | 150<br>5 9/10" | 13,5 1/2"          | mod.7550           | CAT 2                           |

Two fixed and two central sliding wings with opposite opening.  
Wings sliding externally are moved at first by electric actuators with a system of devices for outwards rotating translation.  
The following movement of rotation and translation in front of the fixed wings is manual.  
The doors are subject to quality control tests to comply with ISO 12216.2004 standards.

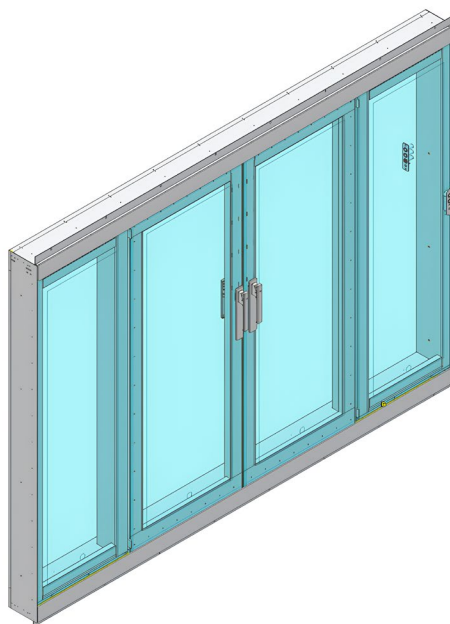