


# Three wings door 2068.11

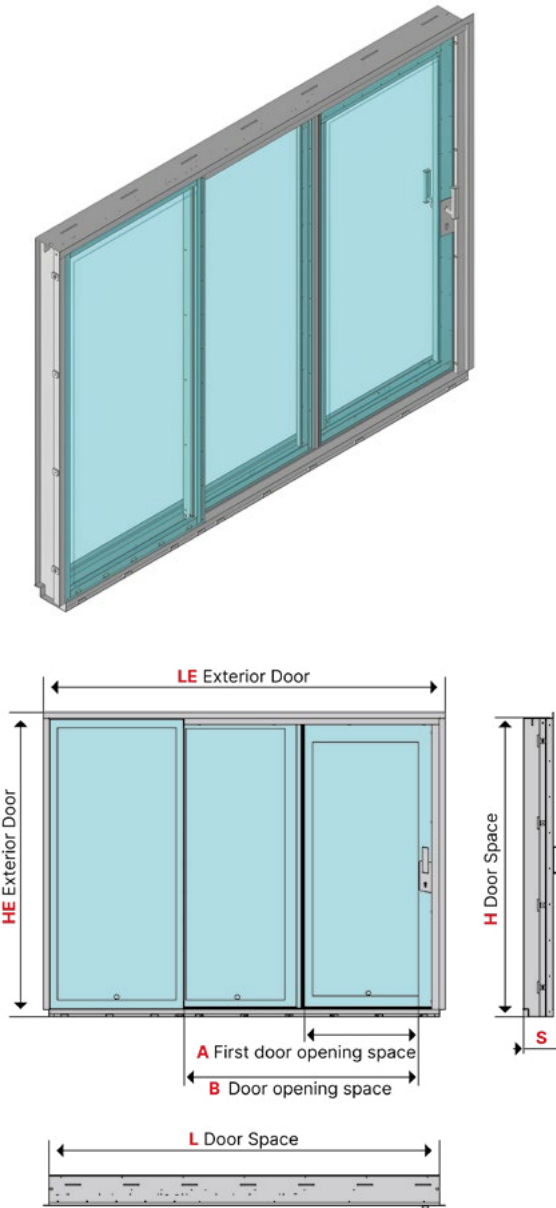

model	A (mm/ inch)	B (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2023
2068/11	750 29 <sup>1</sup> / <sub>2</sub>	1495 58 <sup>9</sup> / <sub>16</sub>	2610 102 <sup>3</sup> / <sub>8</sub>	2685 105 <sup>7</sup> / <sub>16</sub>	2005 78 <sup>9</sup> / <sub>16</sub>	2040 80 <sup>3</sup> / <sub>8</sub>	220 8 <sup>7</sup> / <sub>16</sub>	6 1/8"	mod.7550	Sx↔Dx	CAT 3

**Wings are flush in closed position.**

One fixed wing and two sliding wings with roto-translation movement.  
The doors are subject to quality control tests to comply with ISO 12216.2023 standards.

**NOTE:**

Sx→Dx, Sx↔Dx

The sliding doors opening direction is always considered from the outside of the boat.

