


Four wings door 2068.12/13

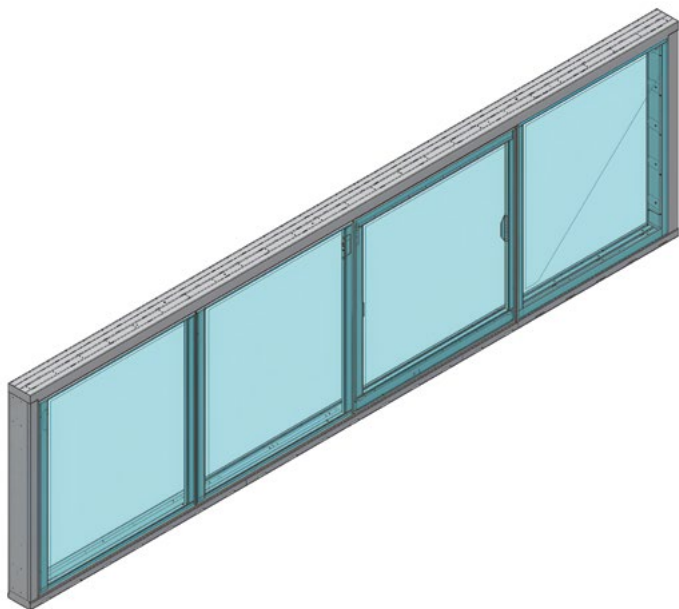

model	A (mm/inch)	B (mm/inch)	C (mm/inch)	L (mm/inch)	H (mm/inch)	S (mm/inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2023
2068/12	1655 65 ¹¹ / ₁₆	3445 135 ⁷ / ₁₆	5230 205 ⁹ / ₁₆	7375 290 ² / ₅	2115 83 ¹ / ₈	255 10"	12 1/2"	mod.7550	Sx→Dx	CAT 2
2068/13	1655 65 ¹¹ / ₁₆	3445 135 ⁷ / ₁₆	5230 205 ⁹ / ₁₆	7375 290 ² / ₅	2115 83 ¹ / ₈	255 10"	12 1/2"	mod.7550	Sx←Dx	CAT 2

Four wings sliding door with one fixed wing, one wing that roto-translates behind the fixed wing and two roto-translating sliding wings. Wings are flush in closed position. The doors are subject to quality control tests to comply with ISO 12216.2023 standards.

NOTE:

Sx→Dx, Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

