


Three wings door 2068.14/15

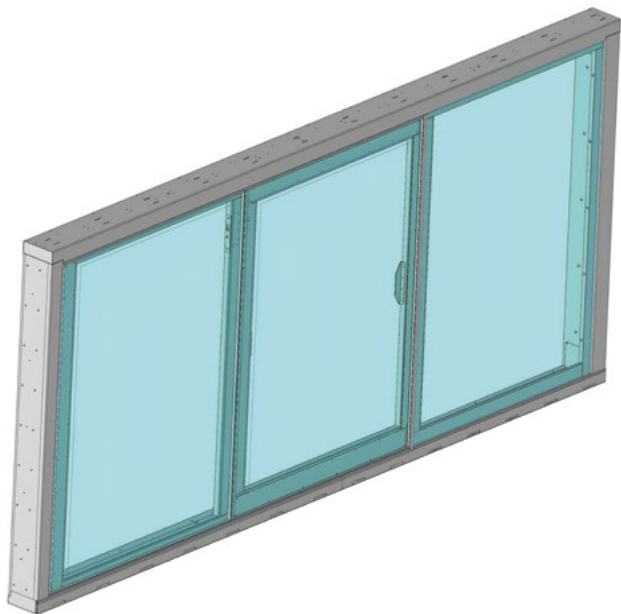

model	A (mm/inch)	B (mm/inch)	L (mm/inch)	H (mm/inch)	S (mm/inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2023
2068/14	1395 54 ⁹ / ₁₀	2845 112"	4580 180 ³ / ₁₀	2135 84 ¹ / ₁₀	215 8 ¹ / ₂ "	12 1/2"	mod.7550	Sx→Dx	CAT 2
2068/15	1395 54 ⁹ / ₁₀	2845 112"	4580 180 ³ / ₁₀	2135 84 ¹ / ₁₀	215 8 ¹ / ₂ "	12 1/2"	mod.7550	Sx←Dx	CAT 2

Wings are flush in closed position.

One fixed wing and two sliding wings with roto-translation movement.

The doors are subject to quality control tests to comply with ISO 12216.2023 standards.

NOTE:

Sx→Dx, Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

