


Four wings door 2069

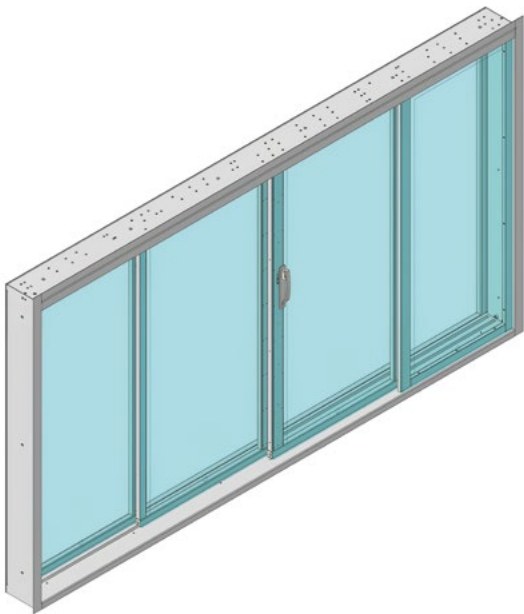

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	glass (mm/inch)	handle standard	weather proof ISO 12216:2023
2069/10	790 31 ¹¹ / ₁₆	1660 65 ³ / ₈	2605 102 ³ / ₈	3705 145 ⁹ / ₁₆	3785 148 ¹ / ₈	2050 80 ⁷ / ₁₆	2100 82 ⁷ / ₁₆	255 10 ¹ / ₈	10 3/8"	mod.7550	CAT 3
2069/11	770 30 ³ / ₁₆	1640 64 ³ / ₈	2585 101 ³ / ₈	3685 145 ¹ / ₈	3765 148 ¹ / ₁₆	2050 80 ⁷ / ₁₆	2100 82 ³ / ₈	255 10"	10 3/8"	mod.7550	CAT 4

Four wings sliding door, composed of two central sliding wings with opposite opening: one leftwards and one rightwards, one mobile wing on the left, normally blocked and one fixed wing on the right side. To completely clear the patio door opening, the two left side wings can be released and folded on the right side, behind the fixed wings.

The doors are subject to quality control tests to comply with ISO 12216.2023 standards.

NOTE:

Sx→Dx, Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

