


Four wings door 2076



model	A (mm/inch)	L (mm/inch)	Le (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	glass (mm/inch)	handle standard	weather proof ISO 12216:2004
2076/14	1565 61 ³ / ₅	3460 136 ¹ / ₅	3535 139 ¹ / ₁₀	1915 75 ² / ₅	1990 78 ³ / ₁₀	90 3 ¹ / ₂	10 3/ ₈ "	mod.7550	CAT 3
2076/15	1370 53 ⁹ / ₁₀	3130 123 ¹ / ₁₀	3185 125 ³ / ₅	1975 77 ⁷ / ₁₀	2025 79 ⁴ / ₅	123 4 ⁴ / ₅	8 3/ ₁₀ "	mod.7550	CAT 3
2076/18	1515 59 ⁷ / ₁₀	3375 132 ⁹ / ₁₀	3425 134 ⁷ / ₁₀	1885 74 ¹ / ₅	1925 75 ⁴ / ₅	123 4 ⁴ / ₅	10 3/ ₈ "	mod.7550	CAT 3
2076/19	1420 55 ⁴ / ₅	3165 124 ³ / ₅	3210 126 ³ / ₅	2050 80 ⁷ / ₁₀	2090 82 ³ / ₁₀	123 4 ⁴ / ₅	10 3/ ₈ "	mod.7550	CAT 3
2076/20	1175 46 ¹ / ₄	2680 105 ¹ / ₂	--	1945 76 ³ / ₅	--	143 5 ³ / ₅	11.5 1/ ₂ "	mod.7550	CAT 3

Two fixed and two central sliding wings with opposite opening.
The doors are subject to quality control tests to comply with ISO 12216.2004 standards.

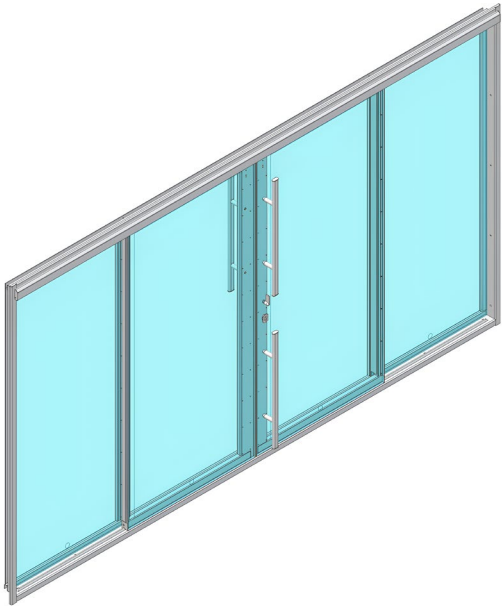