


Six wings door 2111

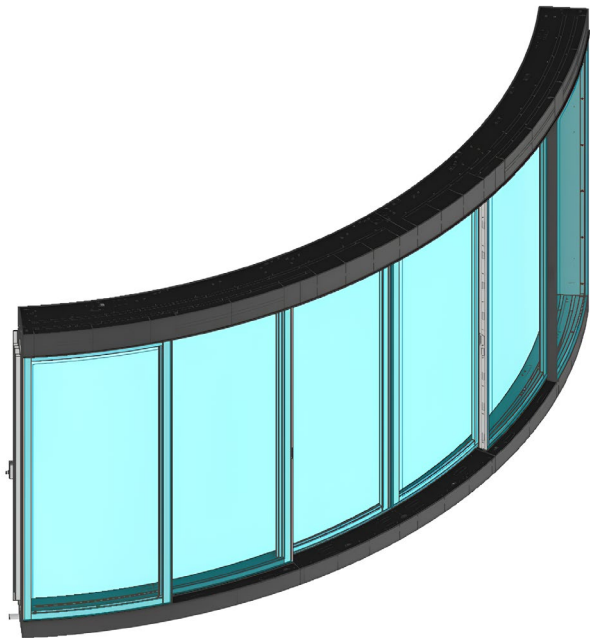

model	A (mm/inch)	B (mm/inch)	R (mm/inch)	Re (mm/inch)	L (mm/inch)	H (mm/inch)	S (mm/inch)	glass (mm/inch)	weather proof ISO 12216:2004
2111/06	190 75 ¹¹ / ₁₆	3730 146 ⁹ / ₁₆	4130 162 ³ / ₈	4500 177 ¹ / ₁₆	5790 227 ⁹ / ₁₆	2685 105 ⁷ / ₁₆	290 11 ³ / ₈	15 ³ / ₈	CAT 3
2111/07	1820 71 ³ / ₈	3715 146 ³ / ₁₆	8370 329 ¹ / ₂	8780 345 ⁷ / ₁₆	5890 231 ⁹ / ₁₆	2220 87 ² / ₈	440 17 ¹ / ₂	17,5 ¹ / ₁₆	CAT 3
2111/09	670 26 ³ / ₁₆	2575 101 ¹ / ₂	3155 124 ¹ / ₈	3575 140 ³ / ₁₆	4245 167	2120 83 ¹ / ₂	370 14 ¹ / ₂	21 ⁴ / ₈	CAT 3
2111/10	2900 114 ¹ / ₈	4265 168	2130 83 ⁹ / ₁₆	2525 99 ¹ / ₂	5000 196 ¹ / ₈	2295 90 ³ / ₁₆	370 14 ¹ / ₂	21 ⁴ / ₈	CAT 3
2111/11	1345 53	2575 101 ¹ / ₂	3155 124 ¹ / ₈	3575 140 ³ / ₁₆	4245 167	2290 90 ¹ / ₈	370 14 ¹ / ₂	21 ⁴ / ₈	CAT 3

Bowed veranda with six wings, four of which central and sliding with opposite opening inside the two fixed ones.

In models 2111.09/10/11, the fixed wings are replaced by two side pockets.

This door can be certified in compliance with RINA/BUREAU VERITAS/LLOYDS requirements, upon request.

ATTENTION! In case of certification request, dimensions and technical specifications may undergo significant variations.

Please get in touch with our technical department to verify possible certifications.

ALL ROUND VERANDAS ARE CUSTOM MADE ONLY.

The doors are subject to quality control tests to comply ISO 12216.2004 standards.

