
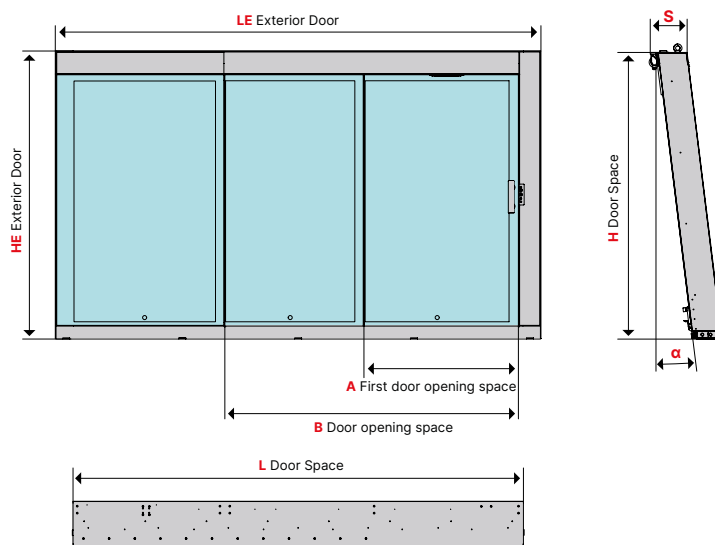


Three wings door 2117

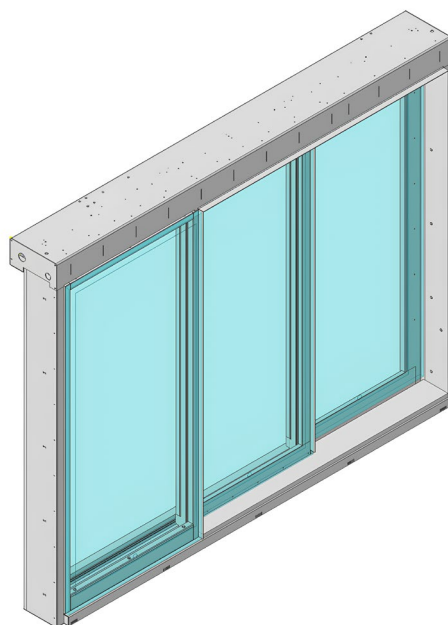

model	A (mm/ inch)	B (mm/ inch)	L (mm/inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	α	glass (mm/inch)	opening	weather proof ISO 12216:2004
2117/03	950 34 ³ / ₈	1915 75 ³ / ₈	3185 125 ³ / ₈	3265 128 ³ / ₈	1990 78 ³ / ₈	2080 81 ¹ / ₈	370 14 ¹ / ₈	-	7 3/8"	Sx←Dx	CAT 3
2117/04	865 34 ¹ / ₁₀	1775 69 ⁴ / ₈	2860 112 ³ / ₈	--	2280 89 ⁴ / ₈	--	375 14 ³ / ₁₀	-	24 9/10"	Sx←Dx	CAT 3
2117/08	1640 64 ¹ / ₂	3315 130 ³ / ₈	5170 203 ¹ / ₂	--	2160 85 ¹ / ₁₀	2260 89"	330 13"	-	7 3/8"	Sx→Dx	CAT 3
2117/09	1285 50 ³ / ₈	2600 102 ³ / ₈	4170 164 ¹ / ₈	--	2200 86 ¹ / ₂	2210 87"	235 9 ³ / ₁₀	7°	13 1/2"	Sx→Dx	CAT 3
2117/10	1285 50 ³ / ₈	2600 102 ³ / ₈	4170 164 ¹ / ₈	--	2200 86 ¹ / ₂	2210 87"	235 9 ³ / ₁₀	7°	13 1/2"	Sx←Dx	CAT 3
2117/11	925 36 ³ / ₁₀	1835 72 ¹ / ₈	2900 114 ¹ / ₈	--	2355 92 ⁴ / ₈	--	400 15 ⁴ / ₈	-	15 3/8"	Sx←Dx	CAT 3
2117/12	975 38 ³ / ₈	1975 77 ⁷ / ₈	3220 126 ⁴ / ₈	3470 136 ⁷ / ₈	2000 78 ⁷ / ₈	2060 81 ¹ / ₈	335 13 ¹ / ₈	-	8 3/8"	Sx←Dx	CAT 3
2117/13	910 35 ⁹ / ₁₀	1835 72 ¹ / ₈	2900 114 ¹ / ₈	--	2300 90 ³ / ₈	2355 92 ⁴ / ₈	400 15 ⁴ / ₈	-	15 3/8"	Sx→Dx	CAT 3
2117/15	1410 55 ¹ / ₂	2855 112 ¹ / ₂	4670 183 ⁴ / ₈	--	1940 76 ³ / ₈	2210 87"	410 16 ¹ / ₁₀	-	15 3/8"	Sx←Dx	CAT 3
2117/16	955 37 ¹ / ₂	1935 76 ¹ / ₁₀	3160 124 ³ / ₈	3235 127 ¹ / ₈	2035 80 ¹ / ₁₀	2050 80 ⁷ / ₁₀	325 12 ¹ / ₈	-	8 3/8"	Sx←Dx	CAT 3
2117/17	1065 41 ⁹ / ₁₀	2245 88 ³ / ₁₀	3515 138 ³ / ₈	--	2365 93 ¹ / ₈	--	425 16 ¹ / ₁₀	-	17,5 7/10"	Sx←Dx	CAT 3
2117/18	1315 51 ⁴ / ₈	2430 95 ⁷ / ₈	3800 149 ³ / ₈	--	2350 95 ³ / ₈	--	425 16 ¹ / ₁₀	-	17,5 7/10"	Sx←Dx	CAT 3
2117/21	695 37 ³ / ₁₀	1375 54 ¹ / ₁₀	3185 125 ³ / ₈	3280 129 ¹ / ₁₀	1850 72 ⁴ / ₈	2045 80 ¹ / ₂	325 12 ⁴ / ₈	-	8 3/8"	Sx←Dx	CAT 3
2117/22	875 34 ¹ / ₂	1785 70 ¹ / ₄	2795 110"	2885 113 ³ / ₈	1935 76 ¹ / ₈	2165 85 ¹ / ₄	410 16 ¹ / ₁₀	-	13,5 1/2"	Sx←Dx	CAT 3
2117/23	1290 50 ³ / ₄	2585 101 ³ / ₄	4170 164 ¹ / ₈	--	2200 86 ³ / ₈	--	240 9 ² / ₈	-	13,5 1/2"	Sx←Dx	CAT 3
2117/24	1290 50 ³ / ₄	2585 101 ³ / ₄	4170 164 ¹ / ₈	--	2200 86 ³ / ₈	--	240 9 ² / ₈	-	13,5 1/2"	Sx→Dx	CAT 3
2117/25	940 37"	1905 75"	3130 123 ¹ / ₈	3205 126 ¹ / ₈	1900 74 ⁴ / ₈	2095 82 ¹ / ₂	325 12 ¹ / ₁₀	-	13,5 1/2"	Sx←Dx	CAT 3
2117/26	940 37"	1905 75"	3130 123 ¹ / ₈	3205 126 ¹ / ₈	1900 74 ⁴ / ₈	2095 82 ¹ / ₂	325 12 ¹ / ₁₀	-	13,5 1/2"	Sx→Dx	CAT 3


One fixed wing and two sliding wings toward the inside of the boat.

The doors are subject to quality control tests to comply with ISO 12216.2004 standards.

NOTE: Sx→Dx, Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

1° OPEN



TOTAL OPEN

