


Four wings door 2121.02/10/13/14

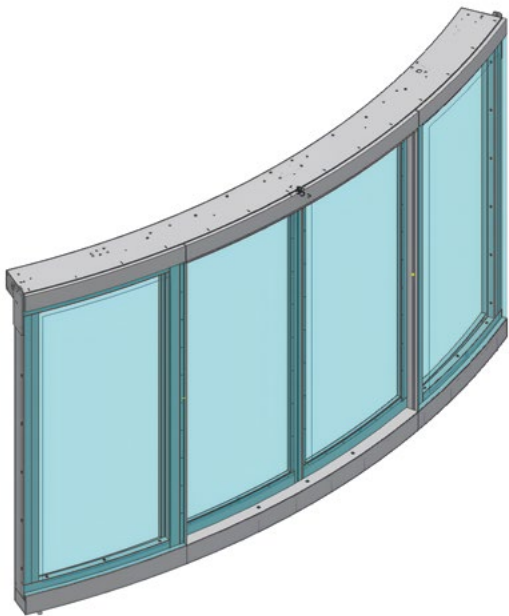

model	A (mm/inch)	R (mm/inch)	Re (mm/inch)	L (mm/inch)	H (mm/inch)	S (mm/inch)	glass (mm/inch)	weather proof ISO 12216:2023
2121/02	1905 74 ⁹ / ₁₀	5130 201 ¹ / ₁₀	5425 213 ³ / ₁₀	4085 160 ⁹ / ₁₀	2340 92 ¹ / ₅	295 11 ³ / ₅	25 1"	CAT 2
2121/10	1455 57 ³ / ₁₀	3630 142 ⁹ / ₁₀	3950 155 ¹ / ₂	3210 126 ² / ₅	2405 94 ¹ / ₁₀	320 12 ³ / ₅	11,5 1/2"	CAT 2
2121/13	1330 52 ¹ / ₅	6640 261 ² / ₅	6920 272 ² / ₅	2880 113 ⁴ / ₅	2155 84 ⁴ / ₅	280 11"	13 1/2"	CAT 2
2121/14	2640 103 ⁹ / ₁₀	6550 257 ⁹ / ₁₀	6870 270 ¹ / ₂	5590 220"	2245 88 ² / ₅	320 12 ³ / ₅	17,5 7/10"	CAT 2

Flat automatic door with two fixed and two central sliding wings with opposite opening.

Weathertightness granted by the INFLATABLE GASKET.
Pneumatic system composed of valves, hoses, pneumatic gasket, and compressor (if required).
The doors are subject to quality control tests to comply with ISO 12216.2023 standards.

