


# One wing door 2140



model	A (mm/inch)	L (mm/inch)	Le (mm/inch)	H (mm/inch)	S (mm/inch)	glass (mm/inch)	opening	handle standard	weather proof ISO 12216:2023
2140/13	870 34 <sup>3</sup> / <sub>10</sub>	2055 80 <sup>4</sup> / <sub>5</sub>	2085 82"	2275 89 <sup>3</sup> / <sub>5</sub>	185 7 <sup>3</sup> / <sub>10</sub>	10 3/8"	Sx→Dx	mod.7550	CAT 3
2140/14	870 34 <sup>3</sup> / <sub>10</sub>	2055 80 <sup>4</sup> / <sub>5</sub>	2085 82"	2275 89 <sup>3</sup> / <sub>5</sub>	185 7 <sup>3</sup> / <sub>10</sub>	10 3/8"	Sx←Dx	mod.7550	CAT 3
2140/15	1030 40 <sup>1</sup> / <sub>2</sub>	2345 92 <sup>1</sup> / <sub>3</sub>	2390 94"	2125 83 <sup>3</sup> / <sub>5</sub>	160 6 <sup>3</sup> / <sub>10</sub>	15 3/8"	Sx→Dx	mod.7550	CAT 3
2140/16	1920 75 <sup>3</sup> / <sub>5</sub>	4165 164"	4245 167 <sup>1</sup> / <sub>10</sub>	2145 84 <sup>2</sup> / <sub>5</sub>	150 5 <sup>9</sup> / <sub>10</sub>	20 8/10"	Sx←Dx	mod.7550	CAT 3
2140/19	1035 40 <sup>3</sup> / <sub>4</sub>	2800 110 <sup>1</sup> / <sub>4</sub>	--	2670 105 <sup>3</sup> / <sub>10</sub>	205 8"	15 3/8"	Sx→Dx	mod.7550	CAT 3
2140/20	1035 40 <sup>3</sup> / <sub>4</sub>	2800 110 <sup>1</sup> / <sub>4</sub>	--	2670 105 <sup>3</sup> / <sub>10</sub>	205 8"	15 3/8"	Sx←Dx	mod.7550	CAT 3

One sliding wing.  
 The doors are subject to quality control tests to comply with ISO 12216.2023 standards.  
 NOTE: Sx→Dx, Sx←Dx  
 The sliding doors opening direction is always considered from the outside of the boat.

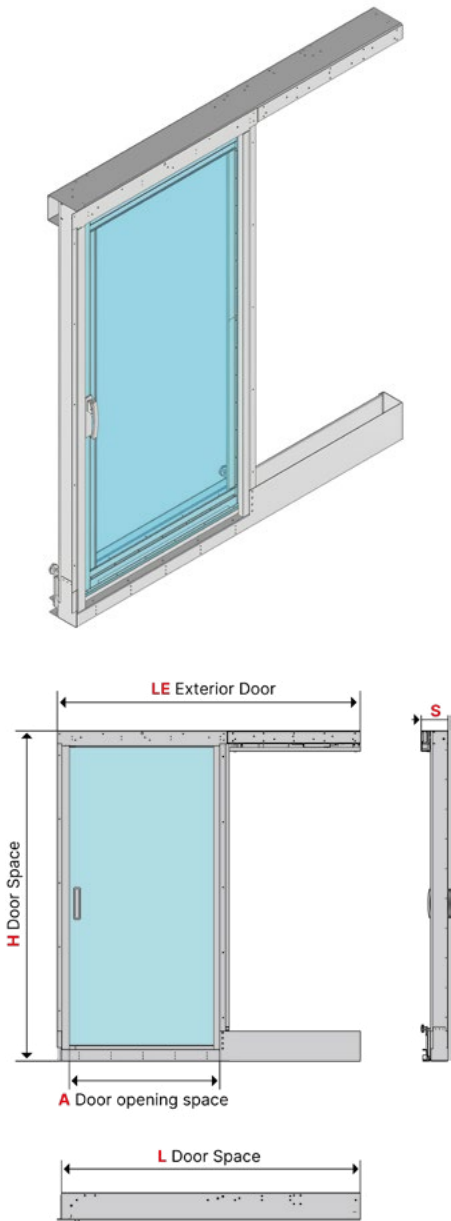