


Four wings door 2155



model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	glass (mm/inch)	opening	weather proof ISO 12216:2023
2155/01	925 36 ¹ / ₂	1875 73 ³ / ₄	2845 111 ⁹ / ₁₆	3985 156 ⁹ / ₁₆	--	1990 78 ³ / ₁₆	--	405 16"	11 3/8"	Sx→Dx	CAT 3
2155/02	915 36 ¹ / ₁₆	1850 72 ³ / ₄	2790 109 ⁴ / ₅	3845 151 ¹ / ₁₆	3890 153 ¹ / ₁₆	2050 80 ¹ / ₁₆	2090 82 ¹ / ₁₆	375 14 ¹ / ₄	8 3/16"	Sx←Dx	CAT 3
2155/03	1300 51 ³ / ₁₆	2620 106 ¹ / ₁₆	3595 141 ³ / ₁₆	5115 201 ¹ / ₂	--	2565 100 ¹ / ₁₆	2665 104 ⁹ / ₁₆	405 16"	9 2/16"	Sx→Dx	CAT 3
2155.04	895 35 ¹ / ₄	1705 67 ¹ / ₁₆	2505 98 ³ / ₁₆	3450 135 ³ / ₁₆	3515 138 ³ / ₁₆	2110 83"	2145 84 ³ / ₁₆	385 15 ¹ / ₁₆	6 1/16"	Sx→Dx	CAT 3
2155/05	925 36 ³ / ₁₆	1865 73 ³ / ₁₆	2775 109 ¹ / ₁₆	3870 152 ³ / ₁₆	--	2175 85 ³ / ₁₆	--	345 13 ¹ / ₁₆	13 1/2"	Sx←Dx	CAT 3
2155/06	925 36 ³ / ₁₆	1865 73 ³ / ₁₆	2775 109 ¹ / ₁₆	3870 152 ³ / ₁₆	--	2175 85 ³ / ₁₆	--	345 13 ¹ / ₁₆	13 1/2"	Sx→Dx	CAT 3
2155/07	780 30 ⁷ / ₁₆	1575 62"	2375 93 ¹ / ₂	3430 135 ¹ / ₁₆	3505 138"	2050 80 ⁷ / ₁₆	2065 81 ³ / ₁₆	385 15 ¹ / ₁₆	6 1/16"	Sx←Dx	CAT 3
2155/08	1310 51 ³ / ₁₆	2620 103 ¹ / ₁₆	3875 152 ¹ / ₂	5430 213 ³ / ₄	--	2185 86"	--	415 16 ¹ / ₁₆	17,5 7/16"	Sx←Dx	CAT 3
2155/09	780 30 ⁷ / ₁₆	1575 62"	2375 93 ¹ / ₂	3430 135 ¹ / ₁₆	3505 138"	1965 77 ¹ / ₁₆	2005 78 ¹ / ₁₆	385 15 ¹ / ₁₆	6 1/16"	Sx→Dx	CAT 3

Flat automatic door with four wings, one fixed and three sliding.
In models 2155.03/05/06/07 the fixed wing is replaced by a side pocket.
The doors are subject to quality control tests to comply with ISO 12216.2023 standards.
NOTE: Sx→Dx, Sx←Dx
The sliding doors opening direction is always considered from the outside of the boat.

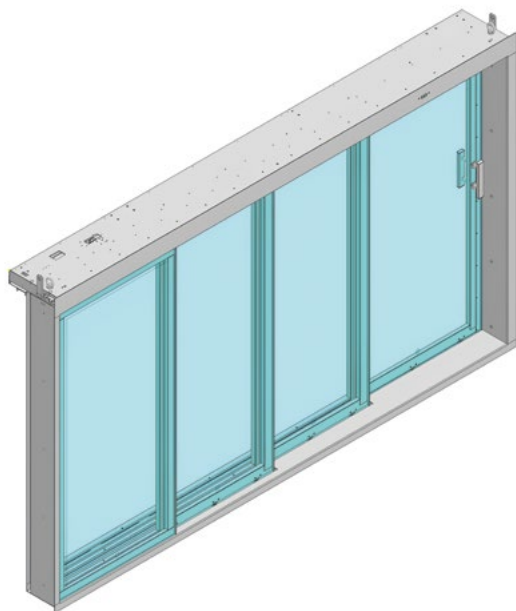