


Door with window 2172



model	A (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	LW (mm/ inch)	H (mm/ inch)	He (mm/ inch)	Hw (mm/ inch)	S (mm/ inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2023
2172/01	1265 49"4/5	1900 74"4/5	3205 126"1/10	1600 62"9/10	2025 79"3/5	3820 150"3/10	1125 44"3/10	180 7"1/10	8 3/10"	mod.7550	Sx→Dx	CAT 4

One fixed wing and one sliding wing (CUSTOMIZED).
Glass door with double movement system. Manual horizontal sliding for main wing opening and automatic vertical descent both of main wing and fixed wing.
Hydraulic locking pins for door block in up and down position.
Recessed handle and inner and outer locking barrel.
The doors are subject to quality control tests to comply with ISO 12216.2023 standards.
NOTE: Sx→Dx Sx←Dx
The sliding doors opening direction is always considered from the outside of the boat.

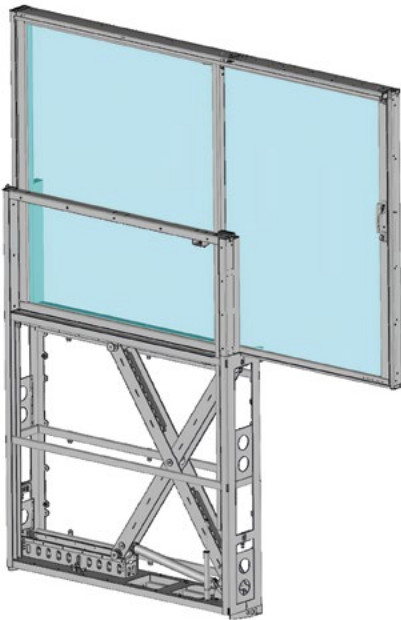