


# Door with window 2173



model	A (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	LW (mm/ inch)	H (mm/ inch)	He (mm/ inch)	Hw (mm/ inch)	S (mm/ inch)	glass (mm/inch)	handle standard	opening	weather proof ISO 12216:2023
2173/01	1075 43 <sup>3</sup> / <sub>10</sub>	1550 61"	3190 125 <sup>3</sup> / <sub>5</sub>	1490 58 <sup>7</sup> / <sub>10</sub>	2035 80 <sup>1</sup> / <sub>10</sub>	3310 130 <sup>3</sup> / <sub>10</sub>	935 36 <sup>9</sup> / <sub>10</sub>	245 9 <sup>3</sup> / <sub>5</sub>	8 <sup>3</sup> / <sub>10</sub> "	mod.7550	Sx←Dx	CAT 4

One fixed wing and one sliding wing (CUSTOMIZED).  
 Right side manual window with gas spring upward opening.  
 Glass door with double movement system. Manual horizontal sliding for main wing opening and automatic vertical descent both of main wing and fixed wing. Hydraulic locking pins for door block in up and down position.  
 Recessed handle and inner and outer locking barrel.  
 The doors are subject to quality control tests to comply with ISO 12216.2023 standards.  
 NOTE: Sx→Dx Sx←Dx  
 The sliding doors opening direction is always considered from the outside of the boat.

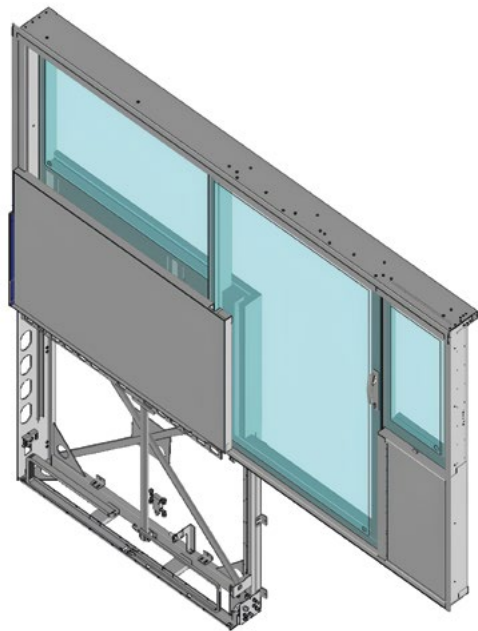