


Four wings door 2176

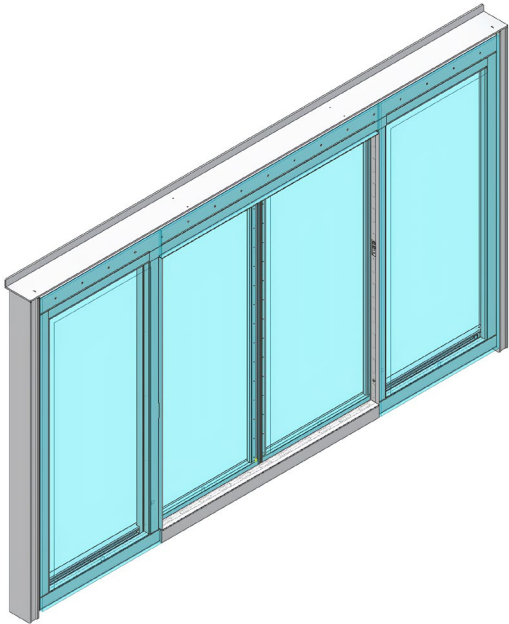

model	A (mm/inch)	L (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	glass (mm/inch)	weather proof ISO 12216:2004
2176/02	1785 70 ¹¹ / ₁₆	3960 155 ⁹ / ₁₆	2280 89 ⁷ / ₁₆	2370 93 ¹¹ / ₁₆	230 9	17 3 ¹ / ₁₆ "	CAT 2
2176/10	1355 53 ³ / ₁₆	2950 116 ¹ / ₁₆	2140 84 ³ / ₁₆	--	260 10 ¹ / ₁₆	13 1 ¹ / ₂ "	CAT 2
2176/11	1110 43 ⁷ / ₁₆	2486 97 ⁹ / ₁₆	2230 87 ⁹ / ₁₆	--	265 10 ³ / ₁₆	13 1 ¹ / ₂ "	CAT 2
2176/12	1340 52 ⁴ / ₁₆	2950 116 ¹ / ₁₆	2140 84 ³ / ₁₆	--	260 10 ¹ / ₁₆	13 1 ¹ / ₂ "	CAT 2

Flat automatic door with four wings.
Two fixed side wings and two central wings with opposite opening direction and internal sliding, behind the fixed side wings.

Weather tightness granted by the INFLATABLE GASKET.
Pneumatic system composed of valves, hoses, pneumatic gasket, and compressor (if required).
The doors are subject to quality control tests to comply ISO 12216.2004 standards.

