


Door with window 2179/01

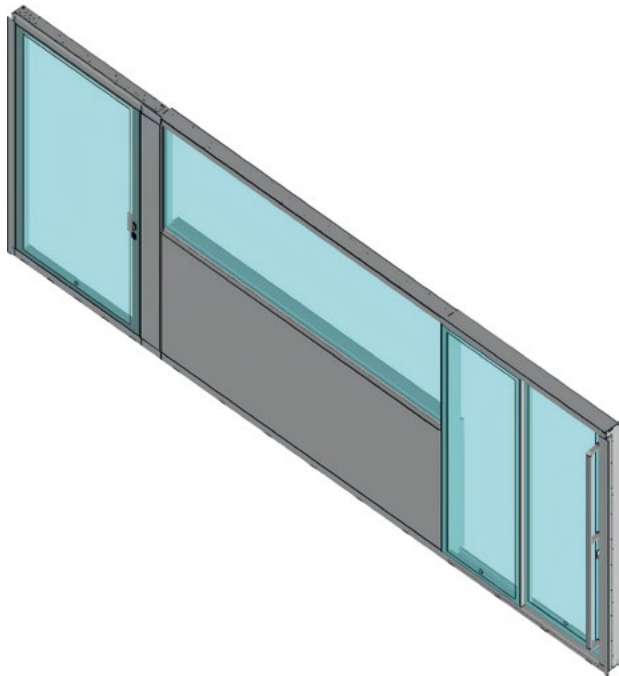

model	A (mm/inch)	B (mm/inch)	L (mm/inch)	LW (mm/inch)	H (mm/inch)	HW (mm/inch)	S (mm/inch)	glass (mm/inch)	weather proof ISO 12216:2023
2179/01	980 38 ³ / ₈	580 22 ⁴ / ₅	5065 199 ² / ₅	2345 92 ¹ / ₃	2030 79 ⁹ / ₁₀	875 34 ² / ₅	175 6 ⁹ / ₁₀	7 3 ¹ / ₁₀ "	CAT 4

Double manual door with automatic window.
 Shutter wing on left side with inner and outer locking barrel.
 Manual sliding wing on right side with inner locking barrel only.
 Automatic window in the central section with dead man command.
 Block in open position both for the sliding and the shutter wing.
 The doors are subject to quality control tests to comply with ISO 12216.2023 standards.
 NOTE: Sx→Dx Sx←Dx
 The sliding doors opening direction is always considered from the outside of the boat.

LEAD TIME TO BE CONFIRMED

