


Door with window 2179.03/05

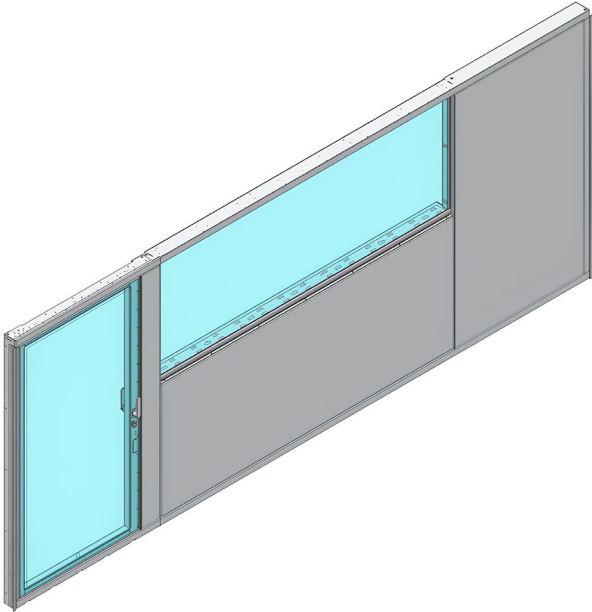


model	A (mm/inch)	L (mm/inch)	Le (mm/inch)	LW (mm/inch)	H (mm/inch)	HW (mm/inch)	S (mm/inch)	glass (mm/inch)	weather proof ISO 12216:2004
2179/03	970 38 ³ / ₁₀	5005 197"	5050 199"	2550 100 ³ / ₁₀	2030 79 ⁹ / ₁₀	800 31 ¹ / ₅	180 7 ¹ / ₁₀	7 ³ / ₁₀ "	CAT 3
2179/05	875 34 ² / ₅	4845 190 ⁴ / ₅	4895 192 ⁴ / ₅	2505 98 ¹ / ₂	2160 85"	850 33 ¹ / ₂	185 7 ¹ / ₅	7 ³ / ₁₀ "	CAT 3

Patio door composed of a hinged wing, automatic central window and one external fixed wing flush with the window glass.


The doors are subject to quality control tests to comply with ISO 12216.2004 standards.

NOTE: Sx→Dx Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

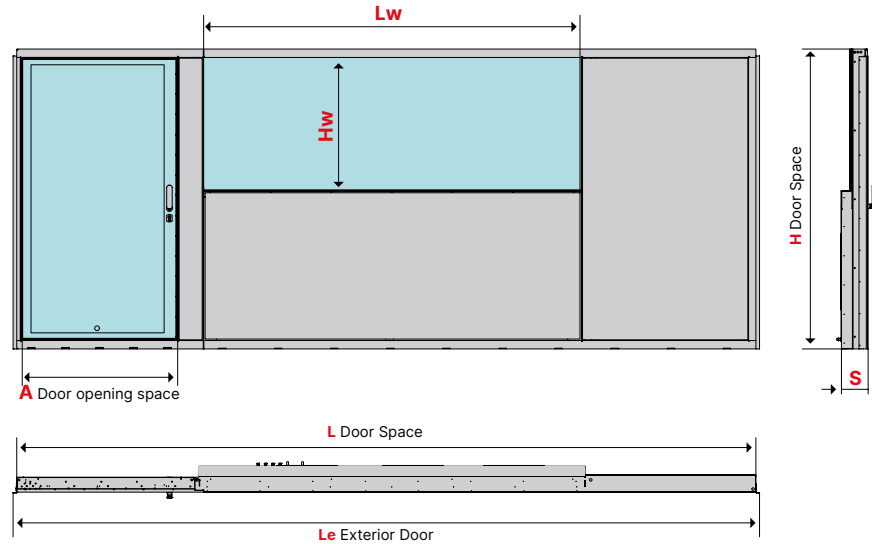

1° OPEN



TOTAL OPEN

