



Two wings door 2198

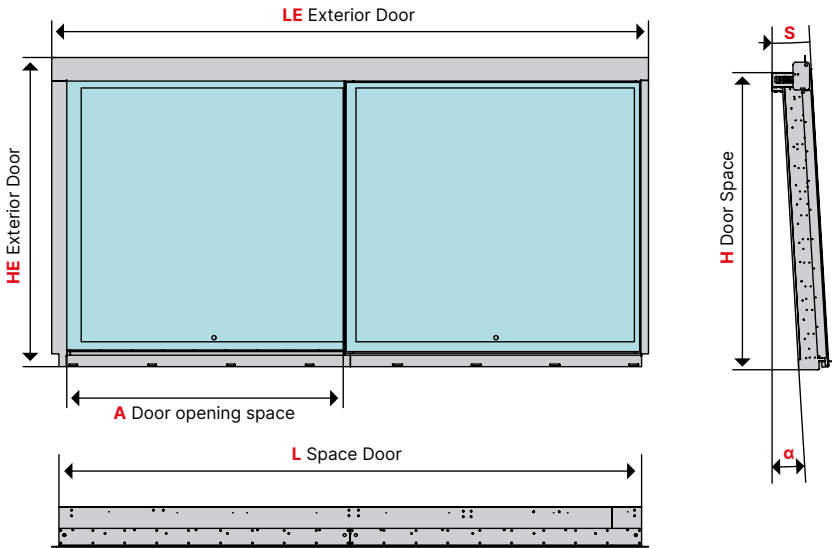

model	A (mm/inch)	L (mm/inch)	Le (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	α	glass (mm/inch)	opening	weather proof ISO 12216:2004
2198/05	1990 78 ³ / ₁₀	4180 164 ³ / ₅	4280 168 ¹ / ₂	2190 86 ¹ / ₅	2215 87 ¹ / ₅	290 11 ² / ₅	-	18 3/ ₁₀ "	Sx→Dx	CAT 2
2198/06	1925 75 ⁴ / ₅	4170 164 ¹ / ₅	4250 167 ³ / ₁₀	2140 84 ³ / ₁₀	2260 88 ⁹ / ₁₀	280 11 ¹ / ₁₀	3°	20 4/ ₅ "	Sx→Dx	CAT 2

One fixed wing and one sliding wing toward the outside of the boat.
 The doors are subject to quality control tests to comply with ISO 12216.2004 standards.
 NOTE: Sx→Dx, Sx←Dx
 The sliding doors opening direction is always considered from the outside of the boat.

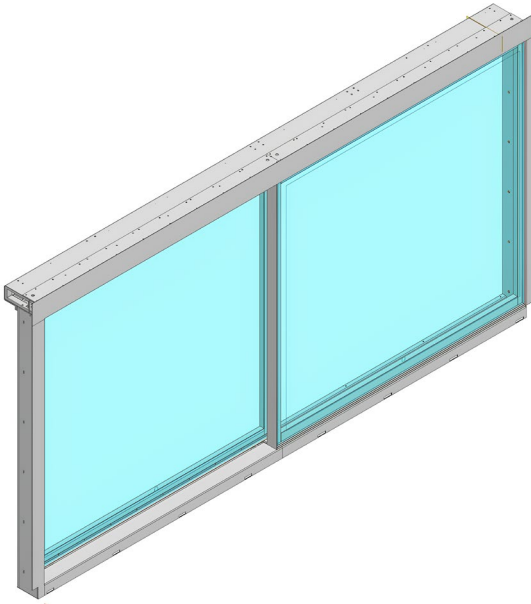