


Hinged door 2301



model	A (mm/inch)	B (mm/inch)	R (mm/inch)	L (mm/inch)	Le (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	opening	weather proof ISO 12216:2004
2301/01	390 15 ³ / ₁₀	1340 52 ³ / ₄	185 7 ³ / ₁₀	460 18 ¹ / ₁₀	550 21 ³ / ₅	1410 55 ¹ / ₂	1500 59"	177 7"	Sx←Dx	CAT 2
2301/02	390 15 ³ / ₁₀	1340 52 ³ / ₄	185 7 ³ / ₁₀	460 18 ¹ / ₁₀	550 21 ³ / ₅	1410 55 ¹ / ₂	1500 59"	177 7"	Sx→Dx	CAT 2
2301/04	900 35 ² / ₅	1900 74 ⁴ / ₅	185 7 ³ / ₁₀	970 38 ¹ / ₅	1060 41 ³ / ₄	1970 77 ¹ / ₂	2060 81 ¹ / ₁₀	177 7"	Sx←Dx	CAT 2

Hinged manual door with swing opening.
SUPPLIED WITH SOUNDPROOF PANEL FOR NOISE REDUCTION.
This door can be certified in compliance with RINA/BUREAU VERITAS/LLOYDS requirements, upon request.
ATTENTION! In case of certification request, dimensions and technical specifications may undergo significant variations. Please get in touch with our technical department to verify possible certifications.
The doors are subject to quality control tests to comply ISO 12216.2004 standards.

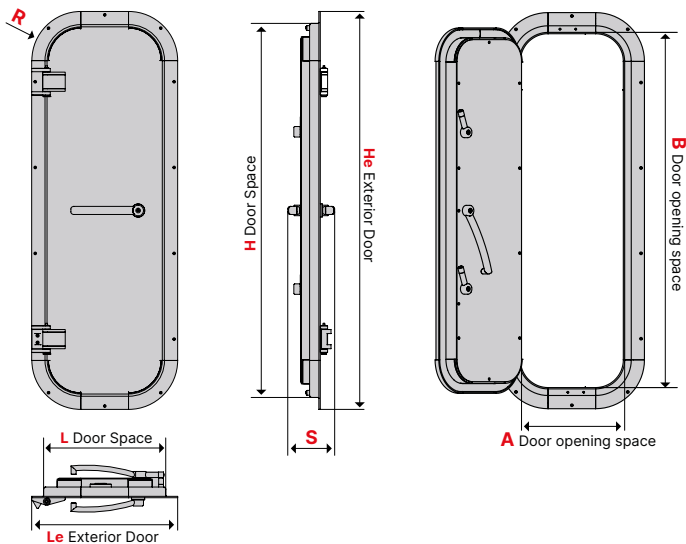