


Hinged door 2308



model	A (mm/inch)	B (mm/inch)	L (mm/inch)	Le (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	glass (mm/inch)	opening	weather proof ISO 12216:2004
2308/03	590 23 ³ / ₁₀	1940 76 ² / ₅	720 28 ³ / ₁₀	--	2025 79 ³ / ₅	--	105 4 ¹ / ₁₀	13 1/2"	Sx→Dx	CAT 2
2308/05	590 23 ³ / ₁₀	1940 76 ² / ₅	720 28 ³ / ₁₀	--	2025 79 ³ / ₅	--	100 3 ⁹ / ₁₀	13 1/2"	Sx←Dx	CAT 2
2308/06	575 22 ⁷ / ₁₀	1865 73 ² / ₅	685 26 ⁹ / ₁₀	730 28 ⁷ / ₁₀	1945 76 ¹ / ₂	2010 79 ¹ / ₁₀	100 3 ⁹ / ₁₀	13 1/2"	Sx←Dx	CAT 2

Hinged manual door with swing opening.
The doors are subject to quality control tests to comply with ISO 12216.2004 standards.
NOTE:
Sx→Dx, Sx←Dx
The sliding doors opening direction is always considered from the outside of the boat.

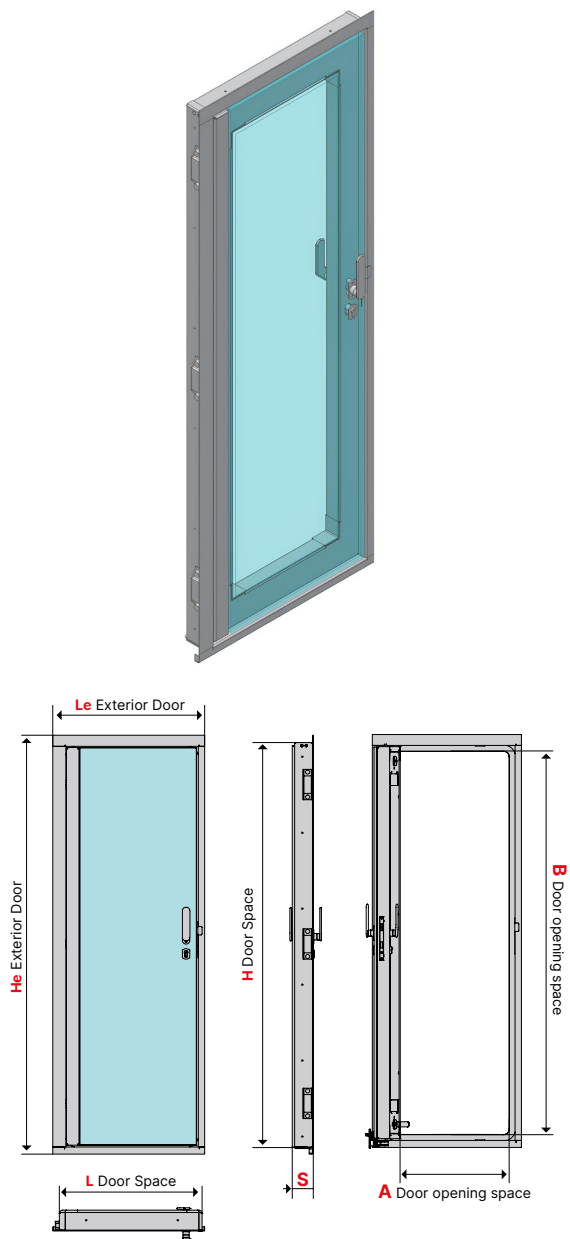