


Hinged door 2331



model	A (mm/inch)	B (mm/inch)	L (mm/inch)	H (mm/inch)	S (mm/inch)	glass (mm/inch)	opening	weather proof ISO 12216:2004
2331/02	550 21 ⁷ / ₁₀	1815 71 ¹ / ₂	790 31"	1940 76 ³ / ₁₀	195 7 ⁴ / ₅	--	Sx→Dx	CAT 2
2331/03	710 28"	1790 70 ¹ / ₂	865 34 ¹ / ₁₀	1870 73 ³ / ₅	179 7"	11 2 ³ / ₅ "	Sx→Dx	CAT 2
2331/04	685 27"	1790 70 ¹ / ₂	840 33 ¹ / ₁₀	1870 73 ³ / ₅	179 7"	11 2 ³ / ₅ "	Sx→Dx	CAT 2
2331/05	685 27"	1790 70 ¹ / ₂	840 33 ¹ / ₁₀	1870 73 ³ / ₅	179 7"	11 2 ³ / ₅ "	Sx→Dx	CAT 2

Hinged manual door with swing opening and automatic closing by means of locking pins.
The doors are subject to quality control tests to comply with ISO 12216.2004 standards.
NOTE:
Sx→Dx, Sx←Dx
The sliding doors opening direction is always considered from the outside of the boat.

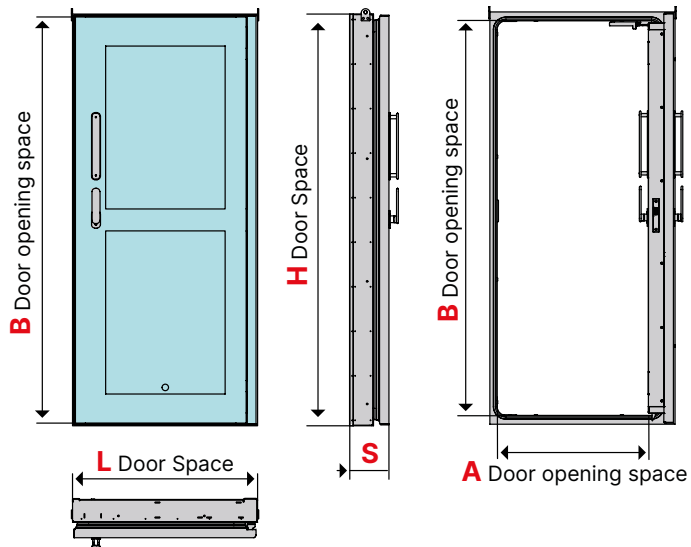