
Pantograph door 2332.68





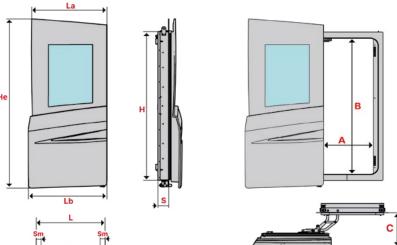

mode	el	A (mm/ inch)	B (mm/inch)	C (mm/inch)	L (mm/ inch)	La (mm/ inch)	Lb (mm/inch)	H (mm/inch)	He (mm/ inch)	Sm (mm/ inch)	S (mm/inch)	St (mm/inch)		weather proof ISO 12216:2023
2332/	88	585 23"	1420 55"%10	300 11"⁴⁄₅	680 26"4/5	745 29"³⁄10	775 30"½	1470 57"%10	1675 65" ⁹ / ₁₀	50 2"	105 4"1∕₅	235 9"³/10	Sx←Dx	CAT 2

Semiautomatic pantograph door (wing manual opening and automatic locking systems). Closing takes place thanks to four locking pins activated by electric actuators. Shaped wing made of fiberglass.

CERTIFIABLE BY RINA / BUREAU VERITAS / ABS / LLOYDS, please get in touch with our technical department to verify possible certifications.

The doors are subject to quality control tests to comply ISO 12216.2023 standards NOTE: $Sx \rightarrow Dx$, $Sx \leftarrow Dx$

The sliding doors opening direction is always considered from the outside of the boat.

