
## Pantograph door 2333.05





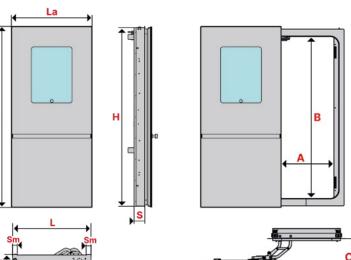

mode	A (mm/inch)	B (mm/ inch)	C (mm/ inch)	L (mm/ inch)	La (mm/ inch)	H (mm/ inch)	He (mm/ inch)	Sm (mm/ inch)	S (mm/inch)	St (mm/ inch)	opening	weather proof ISO 12216:2023
2333/0	475 18"7/10	1695 66"³⁄₄	275 10"⁴⁄₅	795 31"³⁄₁₀	820 32" <sup>3</sup> / <sub>10</sub>	1815 71"½	1840 72"²/₅	50 2"	105 4"½	180 7"	Sx→Dx	CAT 2

Semiautomatic pantograph door (wing manual opening and automatic locking systems). Movement is managed by a roto-translation mechanism with outer sliding pop out system. Closing takes place thanks to four locking pins activated by electric actuators. Flat wing made of aluminium.

CERTIFIABLE BY RINA / BUREAU VERITAS / ABS / LLOYDS, please get in touch with our technical department to verify possible certifications.

The doors are subject to quality control tests to comply ISO 12216.2023 standards NOTE:  $Sx \rightarrow Dx$ ,  $Sx \leftarrow Dx$ 

The sliding doors opening direction is always considered from the outside of the boat.



He