
Hatches pantograph system 2392



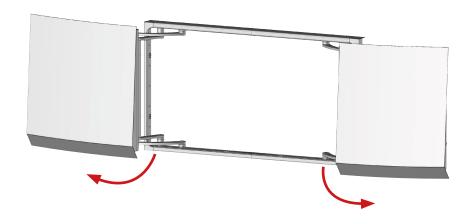

model	A (mm/inch)	B (mm/inch)	C (mm/inch)	H (mm/inch)	L (mm/inch)	Le (mm/inch)	S (mm/inch)	Se (mm/inch)	weather proof ISO 12216:2004
2392/06	3730 146″⁴⁄₅	1995 78"½	1880 74"	2140 95"	3975 156"½	7730 304"⅓	670 26″²/₅	860 33"¼	CAT 2

Weather tight pantograph-opening door with double automatic movement, composed of two doors featuring opposite and simultaneous opening.

Doors movement and closing managed by hydraulic cylinders and twelve automatic locking pins.

This door can be certified in compliance with RINA/BUREAU VERITAS/LLOYDS requirements, upon request.

ATTENTION! In case of certification request, dimensions and technical specifications may undergo significant variations.

Please get in touch with our technical department to verify possible certifications.

The doors are subject to quality control tests to comply ISO 12216.2004 standards.

