


Companionway 2534.20

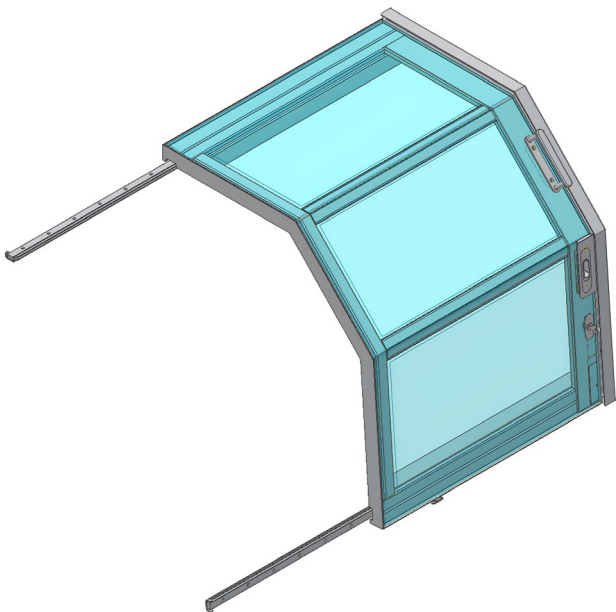

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	Se (mm/ inch)	α	glass (mm/inch)	opening	weather proof ISO 12216:2004
2534/20	620 24 ¹² / ₁₆	970 38 ¹ / ₁₆	52 20 ¹ / ₂	455 17 ⁹ / ₁₆	560 22"	895 35 ³ / ₁₆	1520 59 ¹⁵ / ₁₆	715 28 ¹ / ₁₆	905 35 ³ / ₁₆	80 3 ¹ / ₁₆	115 4 ¹³ / ₁₆	4°	8 3/ ₁₆ "	Sx↔Dx	CAT 2

Sliding companionway with shaped single wing.

The companionways are subject to quality control tests to comply with ISO 12216.2004 standards.

NOTE: Sx→Dx, Sx↔Dx

The sliding doors opening direction is always considered from the outside of the boat.

