


Companionway 2534.22

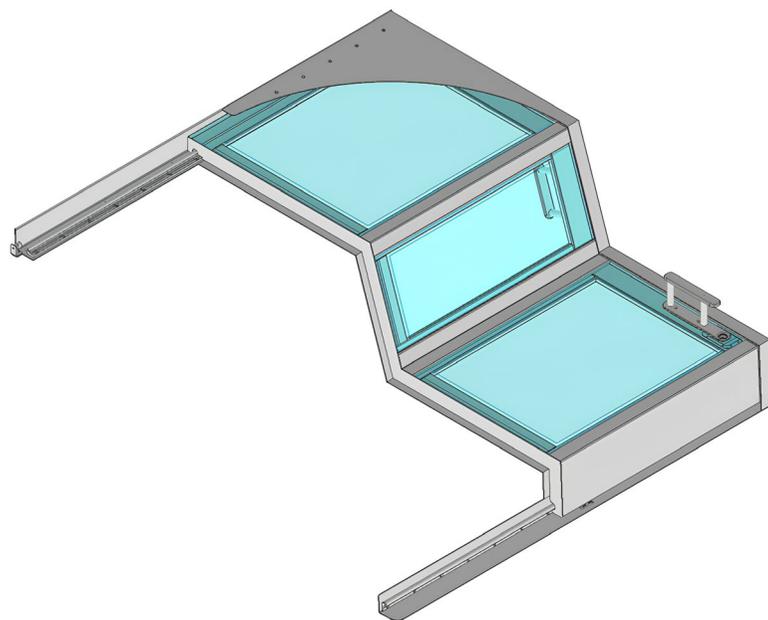

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	α	glass (mm/inch)	opening	weather proof ISO 12216:2004
2534/22	740 29 ¹¹ / ₁₆	1545 60 ⁷ / ₁₆	840 33 ³ / ₁₆	440 17 ³ / ₁₆	720 28 ³ / ₁₆	245 9 ⁷ / ₁₆	945 37 ³ / ₁₆	1690 66 ¹ / ₂	500 19 ⁷ / ₁₆	665 26 ¹ / ₁₆	85 3 ³ / ₁₆	18.5°	6 1/8"	Sx←Dx	CAT 2

Sliding companionway with shaped single wing.

The companionways are subject to quality control tests to comply with ISO 12216.2004 standards.

NOTE: Sx→Dx, Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

