


Companionway 2534.36

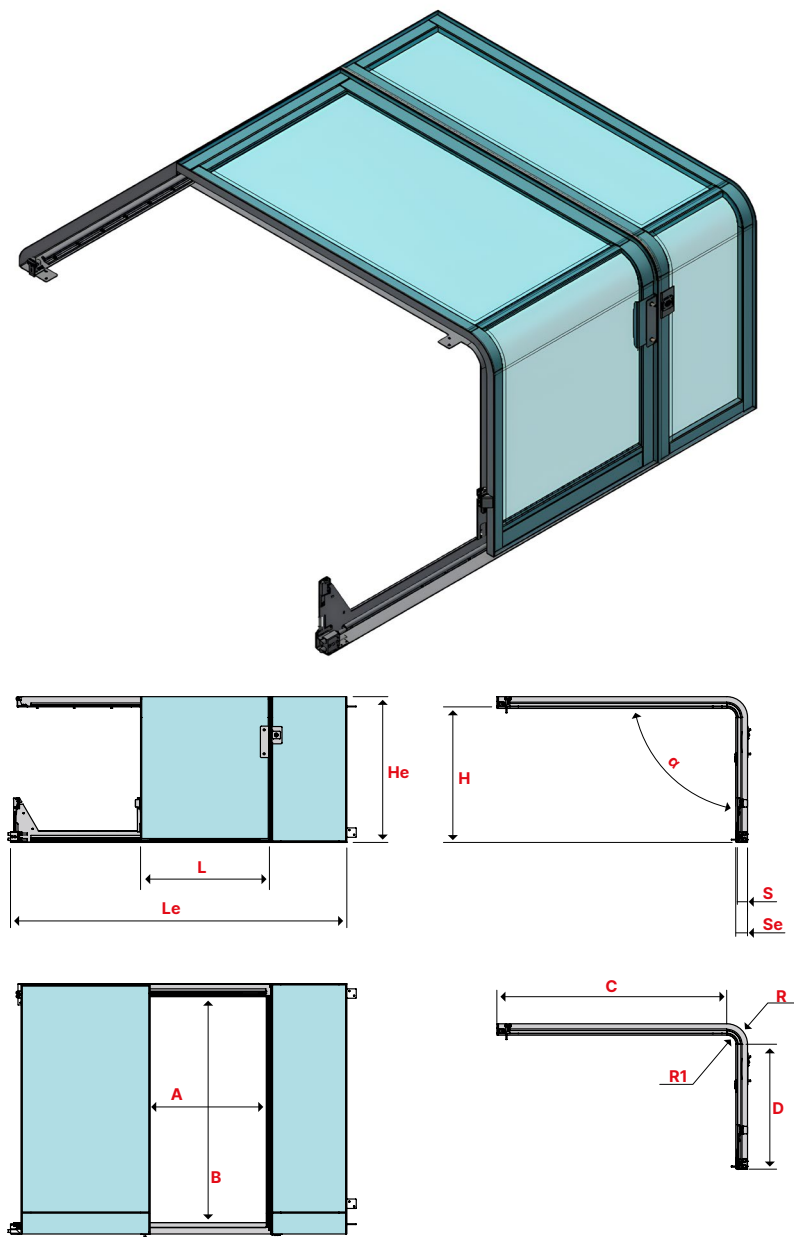

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	R (mm/ inch)	R1 (mm/ inch)	S (mm/ inch)	Se (mm/ inch)	α	β	glass (mm/inch)	opening	weather proof ISO 12216:2023
2534/36	750 29 ¹ / ₂	1460 57 ¹ / ₂	1485 58 ¹ / ₂	810 31 ⁹ / ₁₀	835 32 ⁹ / ₁₀	2175 85 ³ / ₈	875 34 ³ / ₈	940 37"	135 5 ³ / ₈	60 2 ³ / ₈	65 2 ⁵ / ₈	75 3"	153°	90°	11.5 1/2"	Sx↔Dx	CAT 2

Manually sliding companionway with shaped single wing.

The companionways are subject to quality control tests to comply with ISO 12216.2023 standards.

NOTE: Sx→Dx, Sx↔Dx
The sliding doors opening direction is always considered from the outside of the boat.

