


Companionway 2534

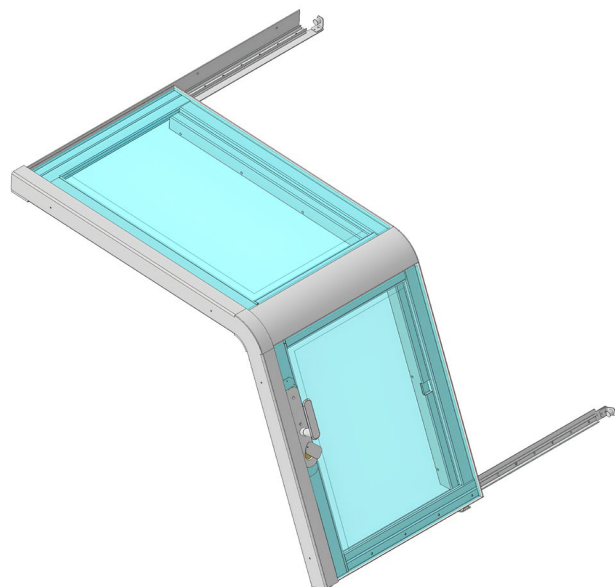

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	R (mm/ inch)	R1 (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	H (mm/ inch)	He (mm/ inch)	S (mm/ inch)	Se (mm/ inch)	α	glass (mm/inch)	opening	weather proof ISO 12216:2004
2534/16	930 36 ⁵ / ₈	635 25"	835 32 ⁹ / ₁₆	650 25 ³ / ₈	--	--	1060 41 ³ / ₈	2025 79 ¹ / ₈	535 21 ¹ / ₈	740 29 ¹ / ₈	80 3 ¹ / ₈	115 4 ¹ / ₂	3,5°	10 2/8"	Sx→Dx	CAT 2
2534/18	965 38"	1010 39 ¹ / ₈	1210 47 ³ / ₈	800 31 ¹ / ₂	--	--	1095 43 ³ / ₈	2095 82 ³ / ₈	670 26 ³ / ₈	870 34 ³ / ₈	80 3 ¹ / ₈	115 4 ¹ / ₂	2°	10 2/8"	Sx→Dx	CAT 2
2534/23	565 22 ¹ / ₈	--	1105 43 ³ / ₈	585 23"	--	--	650 25 ³ / ₈	1210 47 ³ / ₈	590 23 ³ / ₈	--	80 3 ¹ / ₈	--	--	10 2/8"	Sx→Dx	CAT 2
2534/25	645 25 ³ / ₈	--	1185 46 ³ / ₈	670 26 ³ / ₈	315 12 ³ / ₈	180 7 ¹ / ₈	1500 59"	1605 63 ³ / ₈	925 36 ³ / ₈	1100 43 ³ / ₈	130 5 ¹ / ₈	--	12,7°	"13 1/2"	Sx←Dx	CAT 2
2534/26	590 23 ³ / ₈	885 34 ⁹ / ₁₆	1090 43"	930 36 ³ / ₈	16 3/8"	20 5/8"	830 32 ³ / ₈	1435 56 ³ / ₈	960 37 ³ / ₈	1060 41 ³ / ₈	150 5 ⁹ / ₁₆	--	6,7°	10 2/8"	Sx←Dx	CAT 2
2534/27	565 22 ³ / ₈	1225 48 ¹ / ₈	980 38 ³ / ₈	800 31 ¹ / ₂	140 5 ¹ / ₂	70 2 ³ / ₈	700 27 ¹ / ₈	1310 51 ³ / ₈	790 31 ³ / ₈	930 36 ³ / ₈	80 3 ¹ / ₈	95 3 ³ / ₈	24°	10 2/8"	Sx→Dx	CAT 2
2534/35	630 24 ³ / ₈	1190 46 ³ / ₈	970 38 ³ / ₈	670 26 ³ / ₈	310 12 ³ / ₈	180 7 ¹ / ₈	1500 59"	1605 63 ³ / ₈	925 36 ³ / ₈	1100 43 ³ / ₈	130 5 ¹ / ₈	--	12,7°	13 1/2"	Sx←Dx	CAT 2

Sliding single-wing companionway.

The companionways are subject to quality control tests to comply with ISO 12216.2004 standards.

NOTE: Sx→Dx, Sx←Dx

The sliding doors opening direction is always considered from the outside of the boat.

