
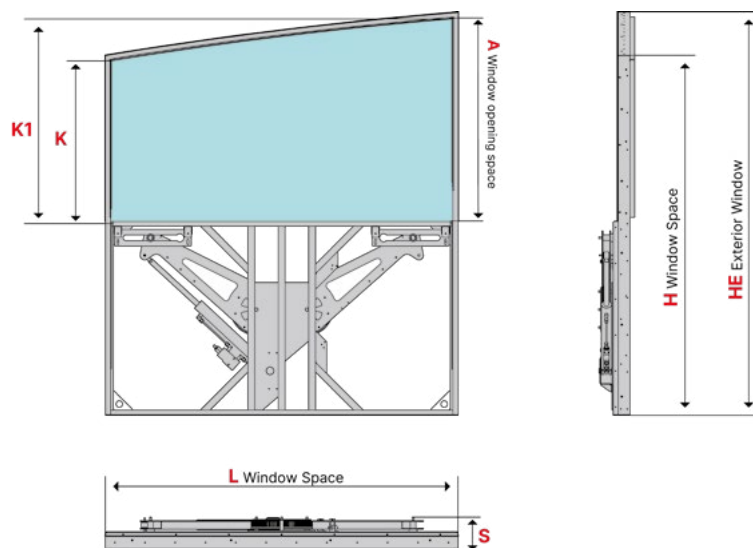


Window 2718

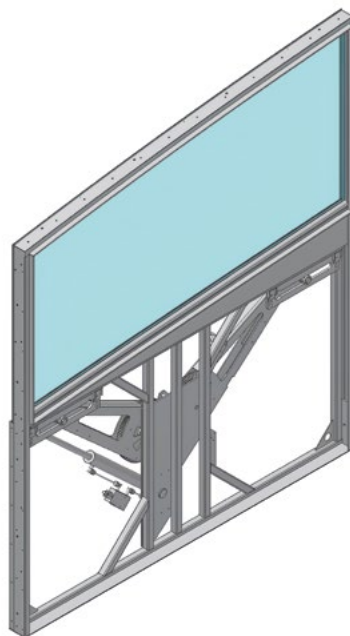

model	A (mm/inch)	K (mm/inch)	K1 (mm/inch)	L (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	glass (mm/inch)	weather proof ISO 12216:2023
2718/20	475 18 ⁷ / ₁₀	830 32 ⁷ / ₁₀	875 34 ¹ / ₂	1090 42 ⁹ / ₁₀	1555 61 ¹ / ₅	1600 63 ¹ / ₁₀	230 9 ¹ / ₁₀	8 ³ / ₁₀ "	CAT 2
2718/23	585 23 ¹ / ₁₀	975 38 ³ / ₅	--	1105 43 ¹ / ₂	820 32 ³ / ₁₀	1825 72 ⁴ / ₅	210 8 ¹ / ₅	8 ³ / ₁₀ "	CAT 2
2718/24	630 24 ³ / ₁₀	735 29"	925 36 ² / ₅	1575 62"	1605 63 ³ / ₁₀	1800 70 ³ / ₁₀	160 6 ³ / ₁₀	11 ² / ₅ "	CAT 2
2718/25	630 24 ³ / ₁₀	735 29"	925 36 ² / ₅	1575 62"	1605 63 ³ / ₁₀	1800 70 ³ / ₁₀	160 6 ³ / ₁₀	8 ³ / ₁₀ "	CAT 2
2718/26	825 32 ¹ / ₂	505 19 ⁹ / ₁₀	960 37 ⁴ / ₅	2210 87"	1215 47 ³ / ₅	1695 66 ³ / ₄	175 7"	11 ² / ₅ "	CAT 3
2718/27	410 16 ¹ / ₁₀	515 20 ³ / ₁₀	975 38 ² / ₅	2210 87"	1230 48 ¹ / ₂	1705 67 ¹ / ₁₀	175 7"	11 ² / ₅ "	CAT 2
2718/28	600 23 ³ / ₁₀	505 19 ⁹ / ₁₀	960 37 ⁴ / ₅	2535 99 ⁹ / ₁₀	1245 49"	1710 67 ³ / ₁₀	175 7"	11 ² / ₅ "	CAT 2
2718/29	595 23 ¹ / ₂	505 19 ⁹ / ₁₀	960 37 ⁴ / ₅	2535 99 ⁹ / ₁₀	1270 50"	1735 68 ³ / ₁₀	175 7"	11 ² / ₅ "	CAT 2
2718/30	560 22 ¹ / ₁₀	575 22 ⁷ / ₁₀	1035 40 ⁷ / ₁₀	2210 87"	1280 50 ³ / ₁₀	1750 69"	175 7"	11 ² / ₅ "	CAT 2
2718/31	560 22 ¹ / ₁₀	575 22 ⁷ / ₁₀	1035 40 ⁷ / ₁₀	2210 87"	1280 50 ³ / ₁₀	1750 69"	175 7"	11 ² / ₅ "	CAT 2
2718/32	710 28"	850 33 ¹ / ₂	1035 40 ³ / ₄	1985 78 ¹ / ₁₀	1810 71 ¹ / ₄	2005 78 ⁹ / ₁₀	160 6 ³ / ₁₀	11 ² / ₅ "	CAT 2
2718/33	710 28"	850 33 ¹ / ₂	1035 40 ³ / ₄	1985 78 ¹ / ₁₀	1810 71 ¹ / ₄	2005 78 ⁹ / ₁₀	160 6 ³ / ₁₀	11 ² / ₅ "	CAT 2

Automatically moved window composed of a stainless steel frame with glass sliding rails and bottom support for fastening of movement system.

The window are subject to quality control tests to comply with ISO 12216:2023 standards.

LEAD TIME TO BE CONFIRMED

