


# Window 2766

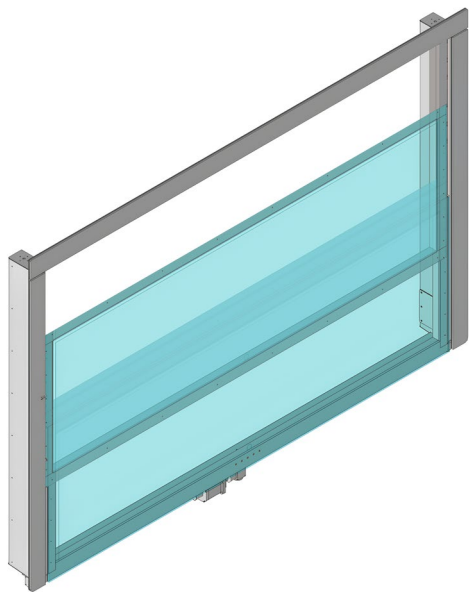

model	A (mm/inch)	L (mm/inch)	Le (mm/inch)	H (mm/inch)	He (mm/inch)	S (mm/inch)	glass (mm/inch)	weather proof ISO 12216:2004
2766/02	850 33 <sup>1</sup> / <sub>2</sub>	2690 105 <sup>9</sup> / <sub>10</sub>	2900 114 <sup>1</sup> / <sub>5</sub>	1730 68"	1995 78 <sup>3</sup> / <sub>5</sub>	265 10 <sup>2</sup> / <sub>5</sub>	10 <sup>3</sup> / <sub>5</sub> "	CAT 2
2766/03	820 32 <sup>1</sup> / <sub>4</sub>	2900 114 <sup>1</sup> / <sub>5</sub>	2980 117 <sup>3</sup> / <sub>10</sub>	1825 71 <sup>9</sup> / <sub>10</sub>	2075 81 <sup>3</sup> / <sub>5</sub>	195 7 <sup>4</sup> / <sub>5</sub>	6 <sup>1</sup> / <sub>5</sub> "	CAT 2

Automatic window with outward roto-translating movement managed by an electric motor.  
Glasses totally flush in closed position.

Installation from the outside of the boat.  
ALL GLASS WINDOW

The window are subject to quality control tests to comply with ISO 12216.2004 standards.

