


Door with window 2A26



model	A (mm/ inch)	B (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	LW (mm/ inch)	H (mm/ inch)	He (mm/ inch)	Hw (mm/ inch)	S (mm/ inch)	glass (mm/inch)	opening	handle standard	weather proof ISO 12216:2004
2A26/02	610 24"	1260 49 ³ / ₅ "	3135 123 ¹ / ₂ "	3185 125 ³ / ₁₀ "	1065 41 ⁹ / ₁₀ "	1990 78 ² / ₅ "	2035 80 ¹ / ₁₀ "	875 34 ² / ₅ "	210 8 ³ / ₁₀ "	6 1 ¹ / ₅ "	Sx→Dx	mod.7550	CAT 3
2A26/03	595 23 ¹ / ₂ "	1145 45"	3135 123 ¹ / ₂ "	3185 125 ³ / ₁₀ "	1065 41 ⁹ / ₁₀ "	1990 78 ² / ₅ "	2035 80 ¹ / ₁₀ "	875 34 ² / ₅ "	210 8 ³ / ₁₀ "	6 1 ¹ / ₅ "	Sx→Dx	mod.7550	CAT 3

One fixed wing, two sliding wings and automatic window.
 Descending automatic window.
 The doors are subject to quality control tests to comply with ISO 12216.2004 standards.
 NOTE: Sx→Dx, Sx←Dx
 The sliding doors opening direction is always considered from the outside of the boat.

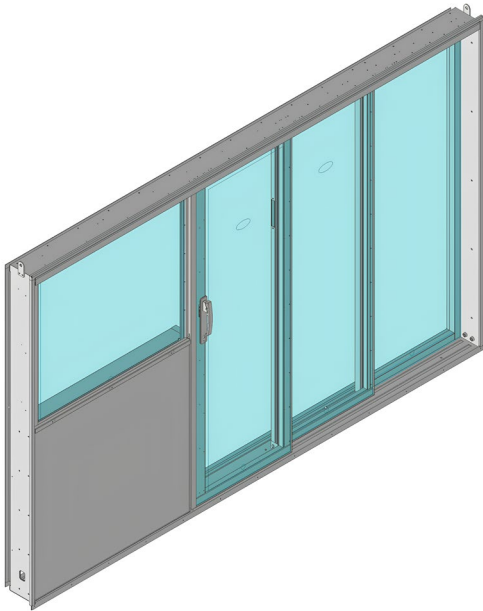