



Three wings door with window 2C03

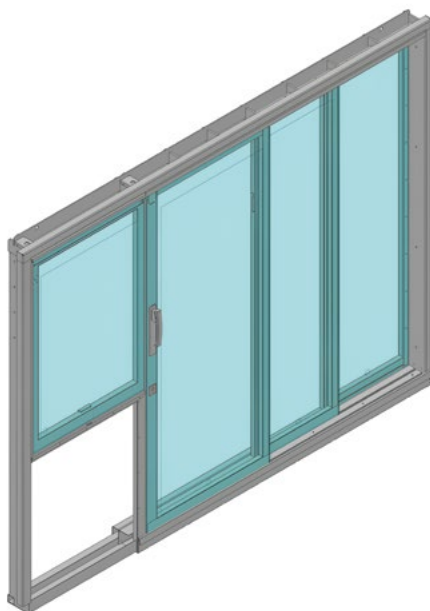

model	A (mm/ inch)	B (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	Lw (mm/ inch)	H (mm/ inch)	He (mm/ inch)	Hw (mm/ inch)	S (mm/ inch)	glass (mm/inch)	opening	handle standard	weather proof ISO 12216:2023
2C03/23	665 26 ¹ / ₁₀	990 39"	2585 101 ³ / ₄ "	2675 105 ³ / ₈ "	675 26 ³ / ₈ "	2065 81 ³ / ₈ "	2080 82"	1075 42 ³ / ₈ "	150 5 ⁹ / ₁₆ "	6 1/8"	Sx→Dx	mod.7550	CAT 3
2C03/25	1345 53"	--	2110 83 ¹ / ₁₀ "	3840 151 ¹ / ₈ "	965 37 ⁹ / ₁₆ "	880 34 ³ / ₈ "	2125 83 ⁷ / ₁₆ "	1115 43 ⁹ / ₁₆ "	160 6 ³ / ₁₆ "	6 1/8"	Sx←Dx	mod.7550	CAT 3
2C03/27	685 27"	1230 48 ³ / ₈ "	2815 110 ³ / ₁₆ "	2905 114 ¹ / ₈ "	870 34 ¹ / ₈ "	2095 82 ¹ / ₂ "	2110 83"	1130 44 ¹ / ₂ "	170 6 ⁷ / ₁₆ "	6 1/8"	Sx←Dx	mod.7550	CAT 3
2C03/28	665 26 ¹ / ₁₀	1060 41 ⁴ / ₅ "	3395 133 ³ / ₈ "	3460 136 ¹ / ₈ "	765 30 ¹ / ₈ "	2005 78 ⁹ / ₁₆ "	2050 80 ³ / ₈ "	996 39 ¹ / ₁₆ "	160 6 ³ / ₁₆ "	6 1/8"	Sx←Dx	mod.7550	CAT 3
2C03/29	715 28 ¹ / ₁₀	880 34 ⁷ / ₁₆ "	2565 100 ⁹ / ₁₆ "	2635 103 ³ / ₈ "	690 27 ¹ / ₁₆ "	2005 78 ⁹ / ₁₆ "	2050 80 ³ / ₈ "	1100 43 ³ / ₁₆ "	160 6 ³ / ₁₆ "	6 1/8"	Sx→Dx	mod.7550	CAT 3
2C03/30	700 27 ³ / ₈ "	1310 51 ³ / ₈ "	2970 116 ⁹ / ₁₆ "	3040 119 ⁷ / ₁₆ "	885 34 ¹ / ₄ "	2075 81 ⁷ / ₁₆ "	--	1090 42 ⁹ / ₁₆ "	150 5 ⁹ / ₁₆ "	6 1/8"	Sx←Dx	mod.7550	CAT 3
2C03/32	450 17 ³ / ₁₆ "	920 36 ¹ / ₈ "	2540 100"	2600 102 ¹ / ₈ "	920 36 ¹ / ₈ "	1915 75 ³ / ₈ "	2000 78 ³ / ₈ "	840 33 ¹ / ₈ "	150 5 ⁹ / ₁₆ "	6 1/8"	Sx←Dx	mod.7550	CAT 3
2C03/34	670 26 ³ / ₁₀ "	1025 40 ³ / ₁₆ "	3250 127 ⁹ / ₁₆ "	3320 130 ⁴ / ₈ "	685 27"	1975 77 ⁴ / ₈ "	2020 79 ³ / ₈ "	970 38 ¹ / ₁₆ "	160 6 ³ / ₁₆ "	6 1/8"	Sx→Dx	mod.7550	CAT 3
2C03/35	625 34 ³ / ₈ "	1260 49 ³ / ₈ "	3825 150 ¹ / ₂ "	3900 153 ¹ / ₂ "	1645 64 ⁷ / ₁₆ "	2065 81 ³ / ₈ "	2095 82 ¹ / ₂ "	1050 41 ³ / ₈ "	160 6 ³ / ₁₆ "	6 1/8"	Sx→Dx	mod.7550	CAT 3
2C03/36	655 25 ⁷ / ₁₆ "	900 35 ¹ / ₂ "	2505 98 ³ / ₈ "	2580 101 ³ / ₈ "	695 27 ¹ / ₈ "	2080 81 ⁹ / ₁₆ "	--	1095 43 ¹ / ₁₆ "	150 5 ⁹ / ₁₆ "	6 1/8"	Sx→Dx	mod.7550	CAT 3

One fixed wing, two sliding wings and manual window with flap door.
The doors are subject to quality control tests to comply with ISO 12216.2023 standards.
NOTE: Sx→Dx, Sx←Dx
The sliding doors opening direction is always considered from the outside of the boat.

LEAD TIME TO BE CONFIRMED

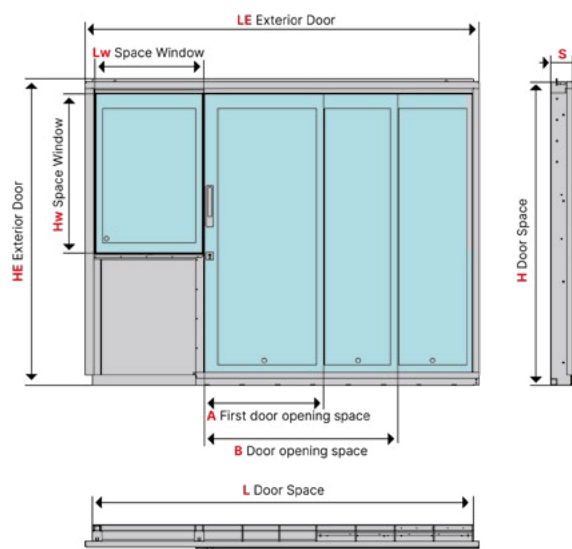

1° OPEN



TOTAL OPEN

