

Door with window 2CO3.38





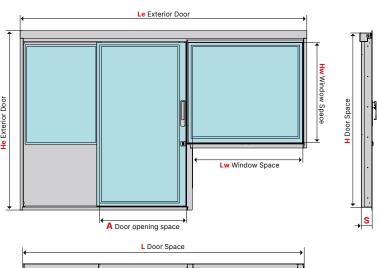

mod	del	A (mm/ inch)	L (mm/ inch)	Le (mm/ inch)	Lw (mm/ inch)	H (mm/ inch)	He (mm/ inch)	Hw (mm/inch)	S (mm/ inch)	glass (mm/inch)	opening		weather proof ISO 12216:2004
2C03	3/38	780 30"7⁄10	3060 120"½	3120 122"%/10	1240 48" ⁹ / ₁₀	1895 74"³⁄₅	1950 76"4/5	1090 42" ⁴ / ₅	120 4"³/₅	6 1/5"	Sx←Dx	mod.7550	CAT 3

One fixed wing, one sliding wing and automatic window with flap door. The doors are subject to quality control tests to comply with ISO 12216.2004 standards. NOTE: $Sx \rightarrow Dx$, $Sx \leftarrow Dx$

The sliding doors opening direction is always considered from the outside of the boat.

